


MAIN APPLICATION	TYPE	MAGNET	
Telecom	26mm	Material	Magnet Size (Round)
		NdFeB	Ø 9,5x1,5mm

ITEM	SPECIFICATIONS	VALUES	TEST CONDITIONS
1	Dimensions	Ø26mm	per mechanical Drawings
2	Impedance	8Ω ±15%	
3	Nominal Power	1,0 W	
4	Max Power	1,5 W	
5	Resonant Frequency	600Hz ±20%	
6	Sensitivity (S.P.L.)	86dB ±3dB	0,1W/0,1m Avg at 0.8/1.0/1.2/1.5kHz
7	Frequency Response	600Hz to 7KHz	
8	THD	10% max	1kHz @ 0,1W
9	Storage Temperature	-30°C to +70°C guaranteed range for transportation & storage	
10	Polarity	Membrane move forward when positive DC is applied to the '+' terminal	

ITEM	TEST	TEST CONDITIONS	RESULT
11	Rub & Buzz	Rated Power Sin wave (range 600Hz - 20kHz)	No Buzzes or Rattles.
12	High Voltage Resistance		
13	Insulation Resistance		
14	Load	Pink Noise at Rated Power for 96h	After 3 hours of rest at room ambient conditions, speakers must meet specs items 2, 5, 6.
15	High Temp.	+80±3°C for 96h (random 45%-85%RH)	
16	Low Temp.	-40±3°C for 96h (random 45%-85%RH)	
17	Humidity	+40±3°C ambient and 92-95%RH for 96h	

Typical Frequency Response

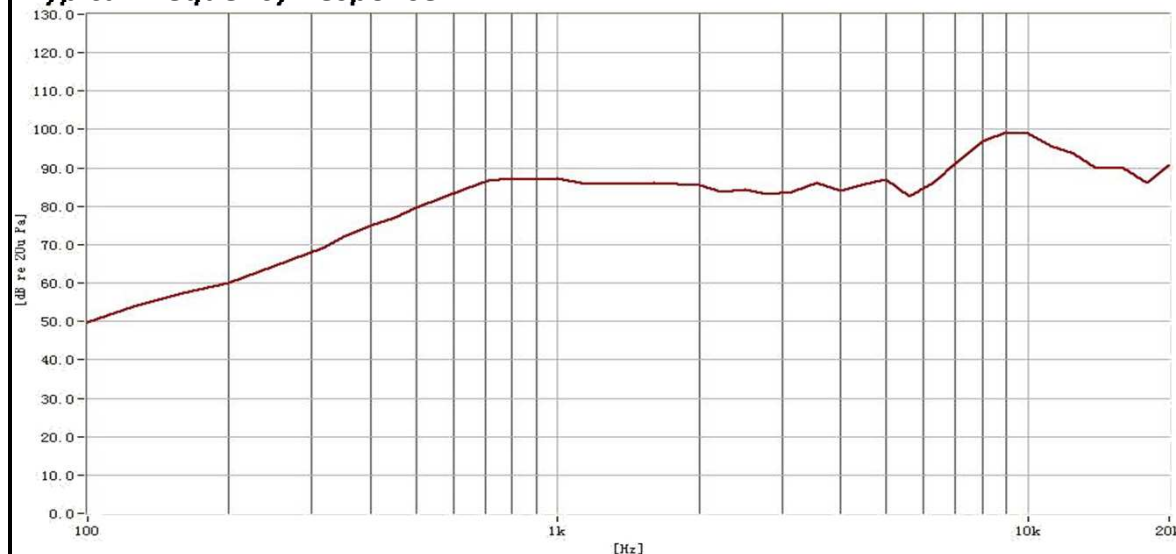


Property of Seltech. Specifications subject to change without notice. www.seltech-international.com

GASKET	MEMBRANE	BASKET	WEIGHT	REMARKS
Paper	Plastic	Metal		

PACKAGING	SPECIFICATIONS	
Carton size:	34,5*26,5*30.5cm	
Qty/Carton:	1000 pcs	
Gross Weight:		

Mechanical Drawings (in mm)

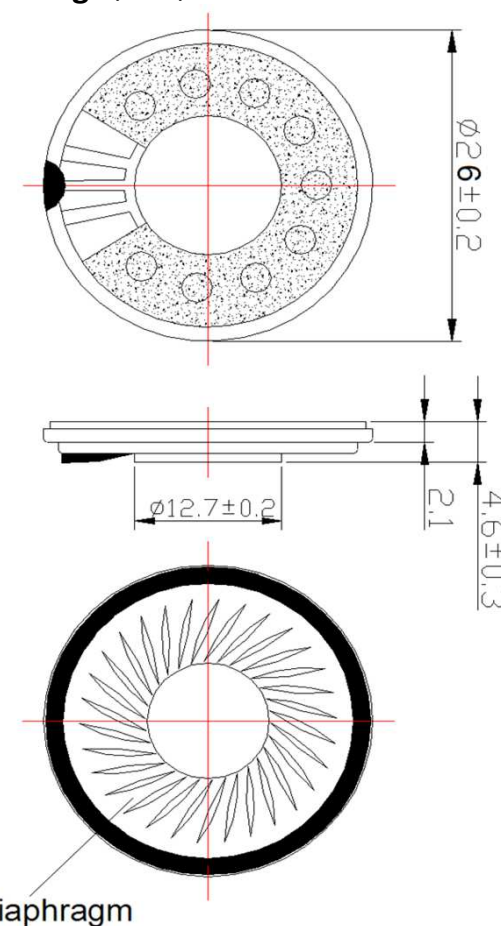

Part n°			
CC26S04BN8G			
REV	DATE	SHEET	RoHS Compliance
0.1	09/03/2016	1 of 1	Yes