



Round Loudspeaker

Ø28.0 × 7.0 mm

CC28L070AN4

Revision

Date	Version	Status	Changes	Approver
2019/6/28	V0.1	Draft	First release	AX
2020/1/17	V0.2	Draft	Update F0 curves	AX
2020/3/24	V0.3	Draft	Update F0 & THD curves	AX
2021/3/2	V0.4	Draft	Update F0 、 SPL & THD curves, add print code	AX


SPECIFICATIONS

Parameter	Conditions/Description	Values	Units
Rated Input Power		2.0	W
Max Input Power		3.0	W
Impedance		4±15%	Ω
Sound Pressure Level (S.P.L.)	at 0.8K 1.0K 1.2K 1.5KHz in1.0W/0.5M average (0dB SPL=20μPa)	80±3	dB
Resonant Frequency (Fo)	at 1.0 V	300±20%	Hz
Frequency Range	Output S.P.L. -10dB	Fo~8K	Hz
Distortion	at 1K Hz, input 0.5W,	< 10%	-
Magnet	NdFeB	Φ15.5*2.2	mm
Buzz, Rattle, etc.	must be normal at sine wave between Fo ~ 5K Hz	2.83	V
Polarity	cone will move forward with positive dc current to“+” terminal		
Weight			g
Operating Temperature		-25~+60	°C
Storage Temperature		-25~+60	°C
Waterproof		N/A	

Above Measuring condition under temperature : 15~35℃ R.H. 25 ~75%.86 kPa to 106 kPa (860 mbar to 1 060 mbar According to standard GB/T 9397—200X and IEC 60268-1

MECHANICAL DRAWING

Units: mm
Tolerance: ±0.5mm

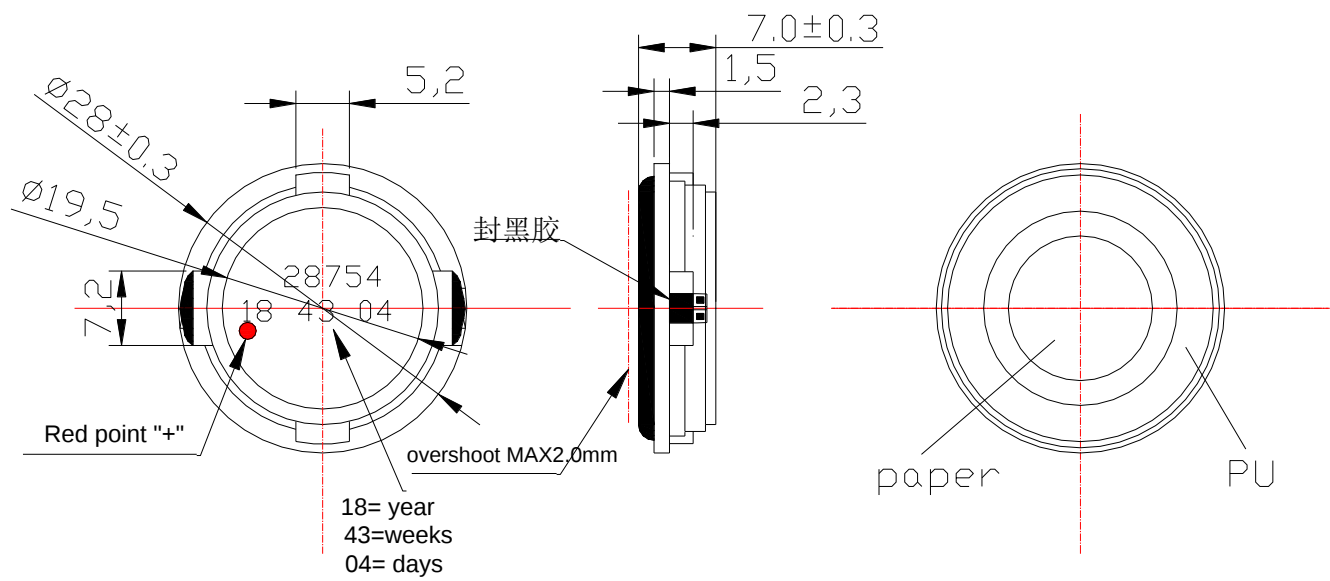


CONSTRUCTION DETAIL

6	Diaphragm	1	Paper+Pu	
5	VOICE COIL	1	Paper+cu	
4	Plate	1	SPCC	
3	Magnet	1	NdFeB	
2	PCB	1	FR4	
1	Frame	1	Plastic	
The material must be meet to GU-001				
PART NO.	PART NAME	Q'TY	MATERIAL	REMARK

RESPONSE CURVES


Frequency Response Curve

Test condition:1.0W/0.5M,

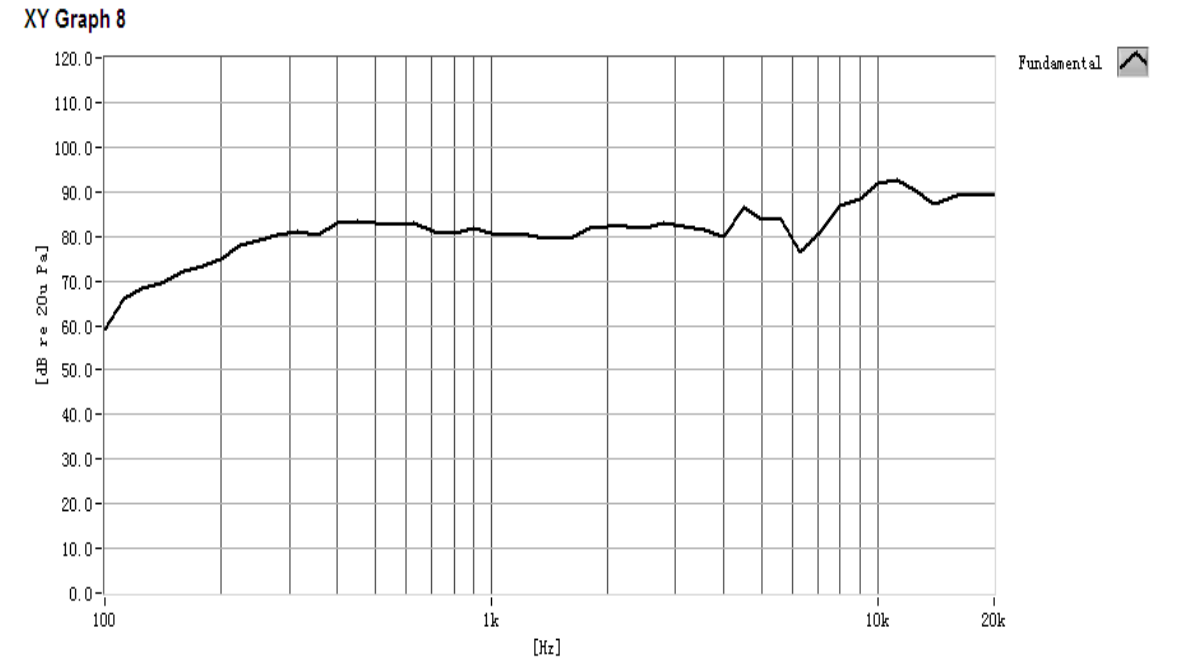

Total Harmonic Distortion Curve

Test condition: 1.0W/0.5M,

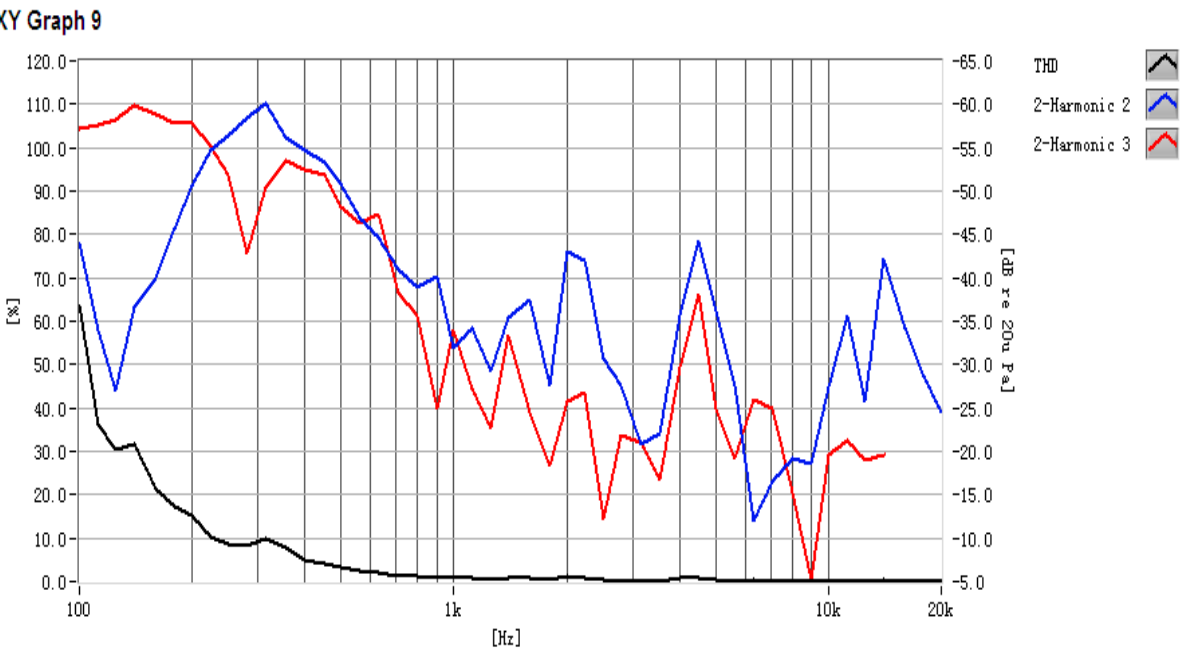

RELIABILITY TEST

1	Reliability Test Performance	After any following test, parts should conform to original performance within ± 3 dB tested with Rated Power, after 6 hours of recovery period.
2	High Temperature Operation and Storage	$+ 60 \pm 2$ °C Humidity Random for 96 Hours. (GB/T 9397—200X)
3	Low Temperature Operation and Storage	$- 25 \pm 2$ °C Humidity Random for 96 Hours. (GB/T 9397—200X)
4	Humidity Test	$+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Relative Humidity(RH)90~95% 48 Hours
5	Temp Cycle	The part shall be subjected 4cycles. One cycle shall be 6 hours and consist of (GB5170.18-87) The diagram illustrates a temperature cycle profile. It starts at $+60^{\circ}\text{C}$ for a duration of 2 hours. This is followed by a 0.5-hour ramp down to $+25^{\circ}\text{C}$, which is held for 1 hour. Another 0.5-hour ramp down leads to -20°C, which is held for 2 hours. The total duration of one cycle is 6 hours, indicated by a dashed line at the bottom.
6	Vibration Test	Frequency 30 ± 15 Hz, Amplitude 1.5 mm for 3 Hours. (GB11606.8-89)
7	Drop Test	75 CM free falling on Concrete floor, 10 times. (GB2423. 8-81)
8	Load test	Must perform normal with program White-Noise source at Rated Power for 96 Hours(GB/T 9397—200X)
9	Termination Strength	Apply 3.0N(0.306kg) to each terminal in horizontal direction for 30 seconds; Apply 2.0N(0.204kg) to each terminal in vertical direction for 30 seconds;

MEASURING METHOD


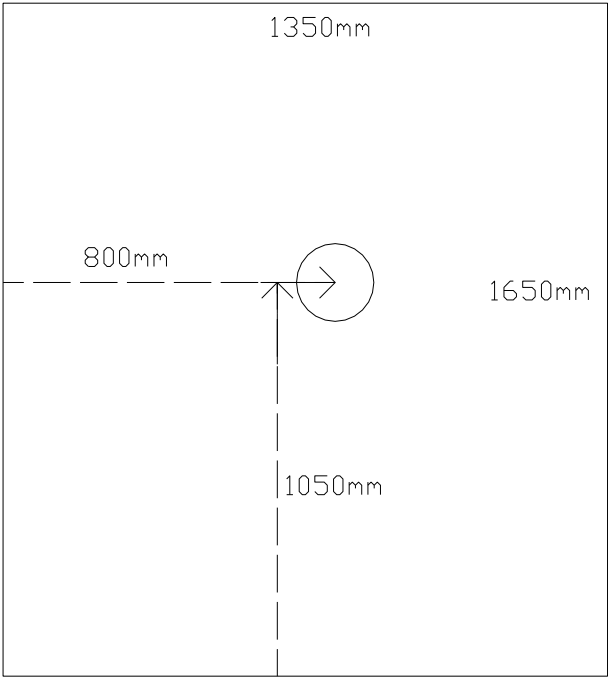


Fig. 1 Block Diagram for Measurement Method

Standard test condition of speaker

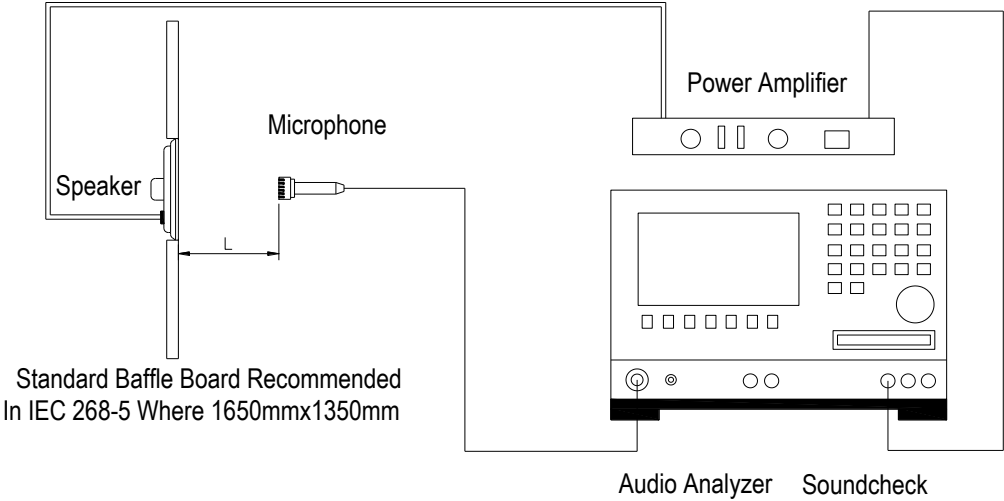

L=50cm

Fig. 2 Speaker Test Condition

PACKAGING


Storage conditions:

Speakers should be well packed.

The temperature should be as stable as possible and between -10°C and $+40^{\circ}\text{C}$.

The relative humidity should be below 90%.

There should be no acid or other harmful gases in the surrounding air (GB/T 9397—200X)

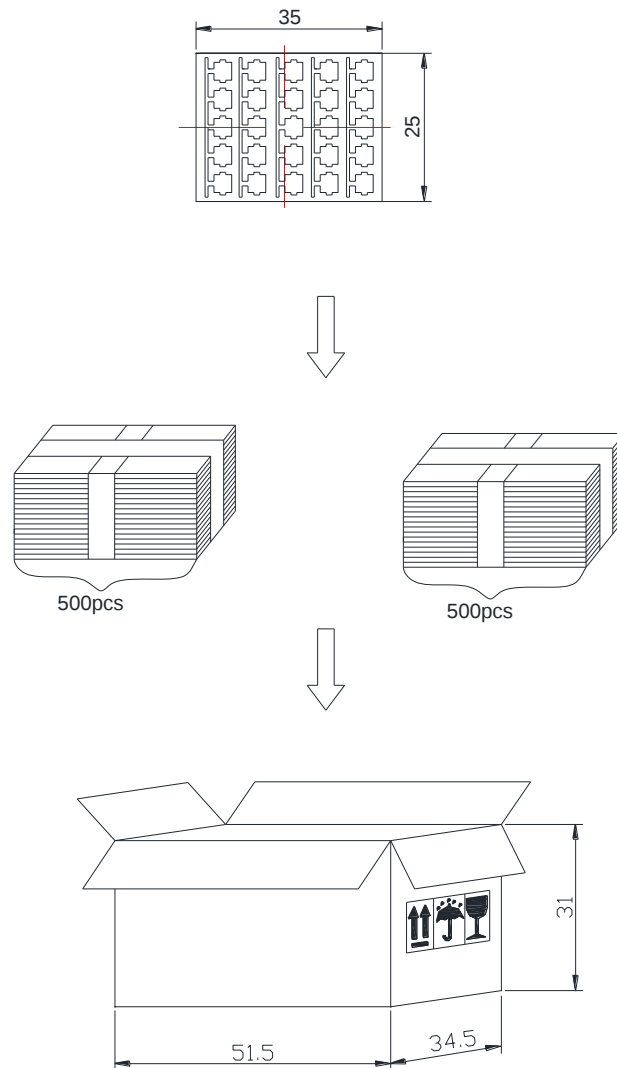

Remark:

25 pcs per tray

20 trays for unit, 2 units per carton

Total:1000 pcs per box

Size:51.5*34.5*31cm

Wight:11.4kg