



# **Round loudspeaker**

**$\phi 40 \times 5.5\text{mm}$**

**With wire,connector  
& gasket**

**CC40C055BN8G**

## **Revision**


<b>Date</b>	<b>Version</b>	<b>Status</b>	<b>Changes</b>	<b>Approver</b>
2022/01/26	V0.1	Draft	First release	AX
2022/04/06	V0.2	Draft	First release	AX
2022/05/10	V0.3	Draft	Add print code	AX

Parameter	Conditions/Description	Values	Units
Rated Input Power		0.5	W
Max Input Power		0.7	W
Rated Impedance	at 2.0 kHz	8±15%	Ω
Sound Pressure Level	at 0.8K 1.0K 1.2K 1.5KHz in 0.1W/0.1M	94±3	dB
Resonant Frequency	at 1.0 V	600±20%	Hz
Frequency Range	Output S.P.L. -10dB	Fo~6K	Hz
Distortion	at 1K Hz, input 0.1W,	< 5%	-
Magnet	NdFeB	Φ12.5*1.5	mm
Buzz, Rattle, etc.	must be normal at sine wave between Fo ~ 5K Hz	2.0	V
Polarity	cone will move forward with positive dc current to “+” terminal		
Weight			g
Operating		-20~+60	°C
Storage Temperature		-30~+70	°C
Waterproof		N/A	

Notes: All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.

MECHANICAL DRAWING

Units: mm  
Tolerance: ±0.5mm

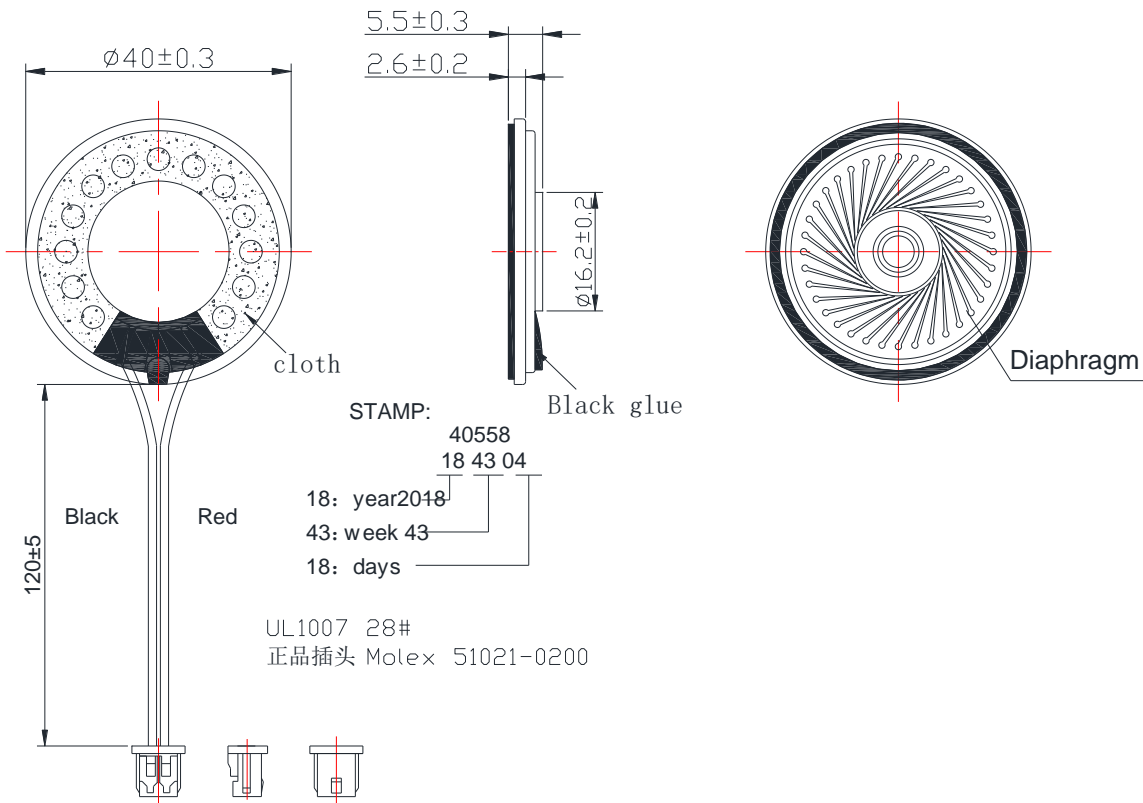


CONSTRUCTION DETAIL

PART NO.	PART NAME	Q' TY	MATERIAL	REMARK
1	Gasket	1	Paper	
2	Diaphragm	1	PET	
3	VOICE COIL	1	Paper Cu	
4	Plate	1	SPCC	
5	Magnet	1	NdFeB	
6	PCB Terminal	1	FR4	
7	Frame	1	SPCC	

RESPONSE CURVES


Frequency Response Curve

Test condition: 0.1W/0.1M,

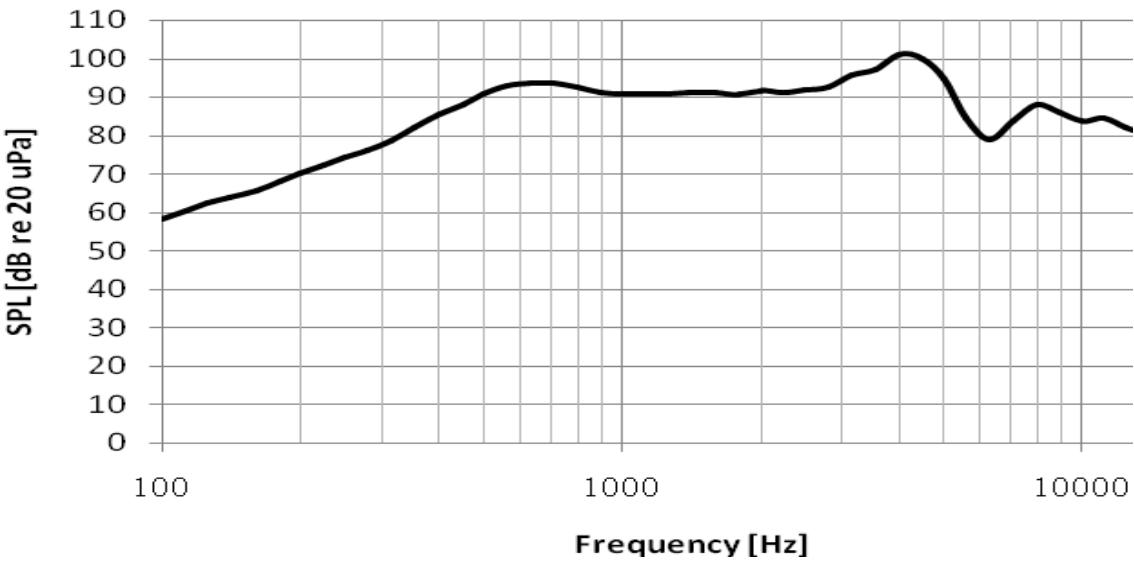


Total Harmonic Distortion Curve

Test condition: 0.1W/0.1M,

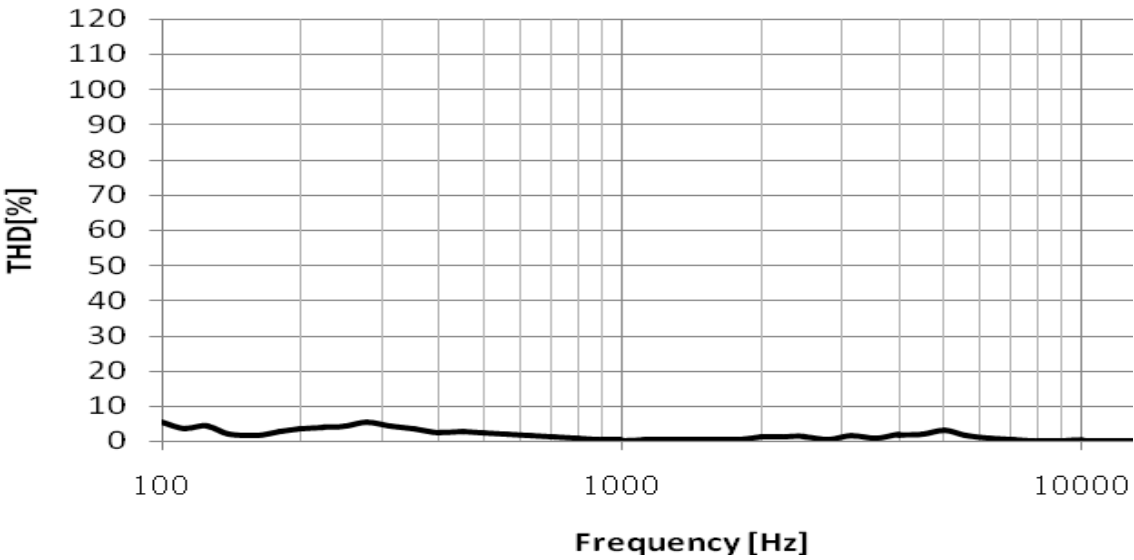

## RELIABILITY TEST

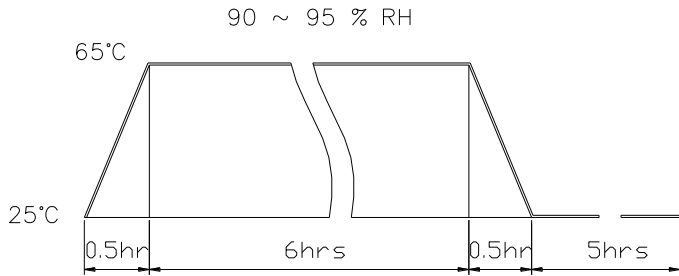1	Reliability Test Performance	After any following test, parts should conform to original performance within $\pm 3$ dB tested with Rated Power, after 6 hours of recovery period.
2	High Temperature Test	96 hours at Maximum Rated Operating Temperature
3	Low Temperature Test	96 hours at Minimum Rated Operating Temperature
4	Humidity Test	96 hours at $+30^{\circ}\text{C} \pm 3^{\circ}\text{C}$ , 92-95% RH
5	Temp./Humidity Cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 6 hours and consist of</p>  <p>The graph illustrates a temperature and humidity cycle. The temperature starts at 25°C, ramps up to 65°C over 0.5 hours, stays at 65°C for 6 hours, and then ramps down to 25°C over 0.5 hours. The humidity is constant at 90 ~ 95 % RH during the 6-hour high-temperature plateau. The total cycle duration is 7 hours.</p>
6	Vibration Test	<p>Frequency: 10~55~10Hz Oct/min      Amplitude: 1.5mm</p> <p>Duration: 2 hours each of 3 perpendicular directions</p>
7	Drop Test	Drop the speaker contained in normal box onto the surface of 40mm thick board 10 times from the height of 75cm
8	Operation Life Test	Must perform normal with program White-Noise source at Rated Power for 96 Hours
9	Termination Strength	Apply 3.0N(0.306kg) to each terminal in horizontal direction for 30 seconds; Apply 2.0N(0.204kg) to each terminal in vertical direction for 30 seconds;

MEASURING METHOD

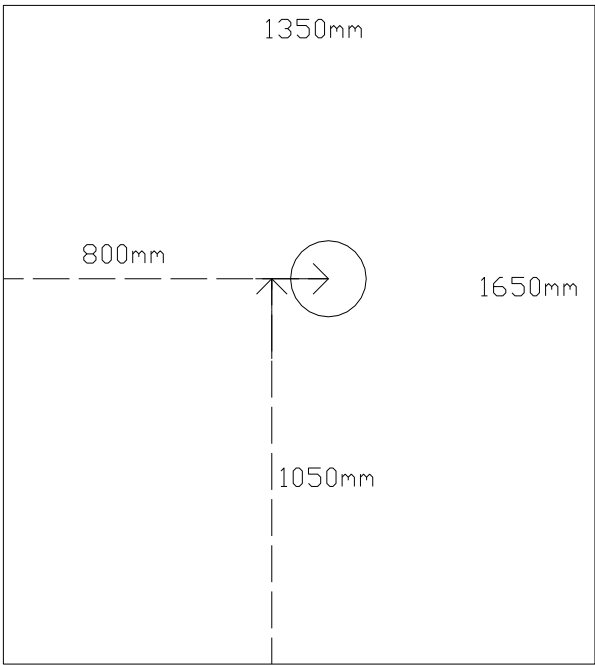


Fig. 1 Block Diagram for Measurement Method

Standard test condition of speaker

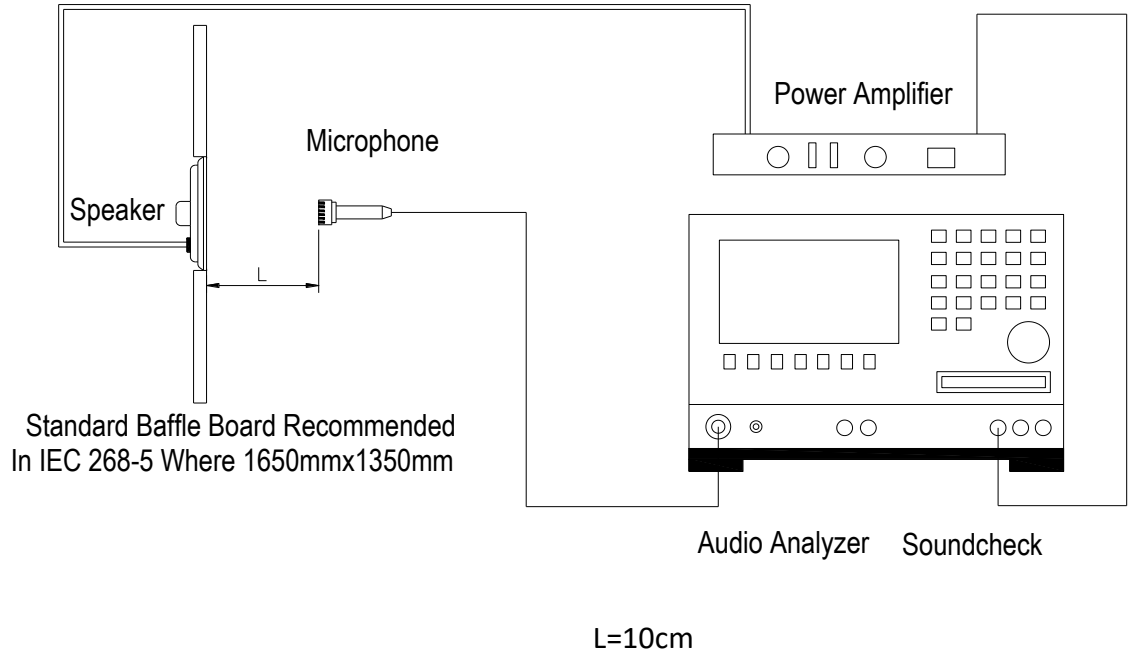


Fig. 2 Speaker Test Condition

## PACKAGING

units: cm

Remark:

25pcs per tray

20 trays for unit, 2 units per carton

Total:1000 pcs per box

Size:51.5\*34.5\*31cm

