



Round loudspeaker

Ø57 × 17.5mm

CC57L175CN4-2

Revision

Date	Version	Status	Changes	Approver
2019/12/12	V0.1	Draft	First release	AX
2020/06/29	V0.2	Draft	Update SPL & THD curve	AX
2020/07/02	V0.3	Draft	Add print code	AX


SPECIFICATIONS

Parameter	Conditions/Description	Values	Units
Rated Input Power		4.0	W
Max Input Power		5.0	W
Rated Impedance	at 2.0 kHz	4±15%	Ω
Sound Pressure Level (S.P.L.)	at 0.6K 0.8K 1.0K 1.2K Hz in 0.1W/0.1M average (0dB SPL=20μPa)	98±3	dB
Resonant Frequency (Fo)	at 1.0 V	550±20%	Hz
Frequency Range	Output S.P.L. -10dB	Fo~20K	Hz
Distortion	at 1K Hz, input 0.1W,	< 5%	-
Magnet	Ferrite	Φ 32*18*4	mm
Buzz, Rattle, etc.	must be normal at sine wave between Fo ~ 5K Hz	4.0	V
Polarity	cone will move forward with positive dc current to “+” terminal		
Weight			g
Operating Temperature		-20~+60	°C
Storage Temperature		-30~+70	°C

Notes: All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.

MECHANICAL DRAWING

Units: mm
Tolerance: ±0.5mm

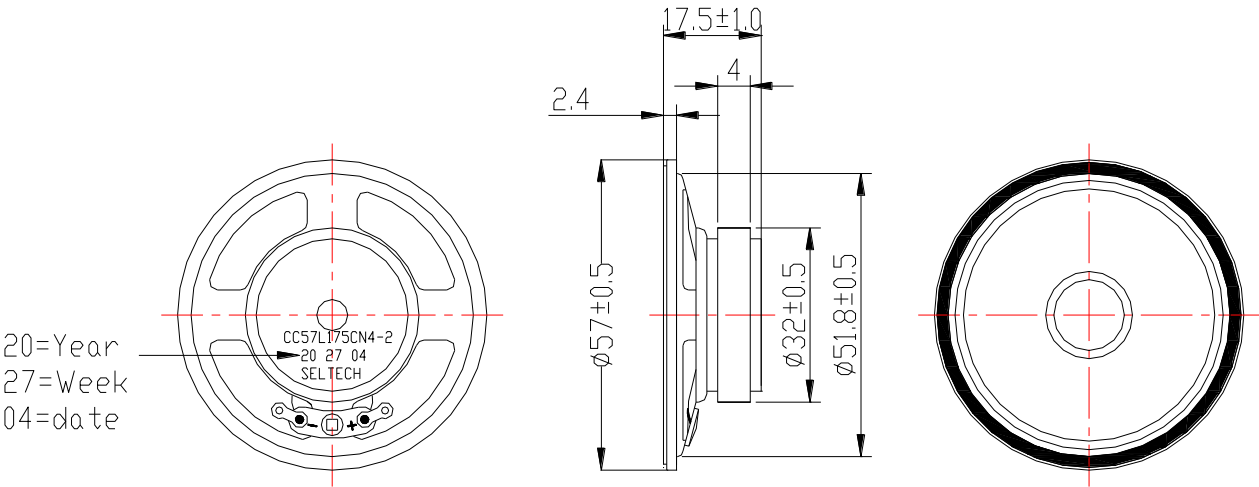


CONSTRUCTION DETAIL

PART NO.	PART NAME	Q'TY	MATERIAL	REMARK
1	Gasket	1	Paper	
2	Diaphragm	1	PET	
3	VOICE COIL	1	Paper Cu	
4	Plate	1	SPCC	
5	Magnet	1	NdFeB	
6	PCB Terminal	1	Paper+meter	
7	Frame	1	SPCC	


RESPONSE CURVES

Frequency Response Curve


Test condition: 0.1W/0.1M,

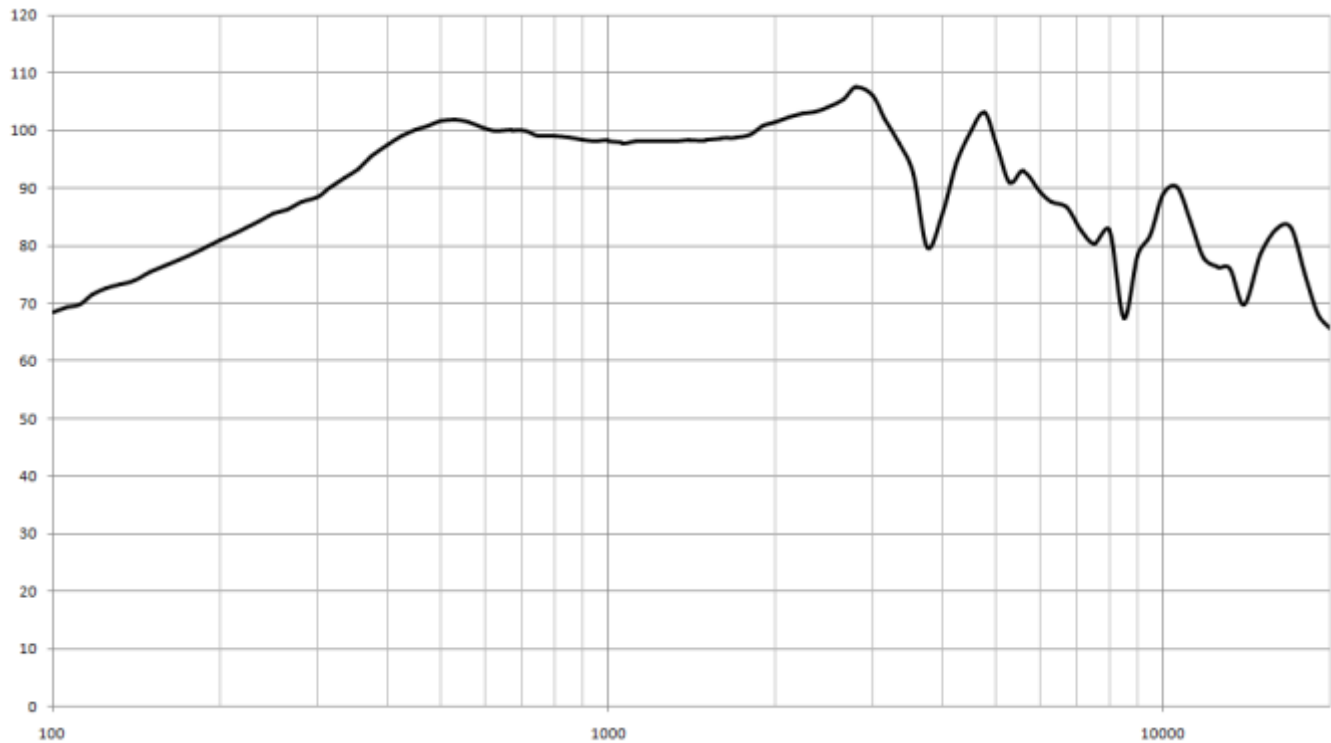

THD

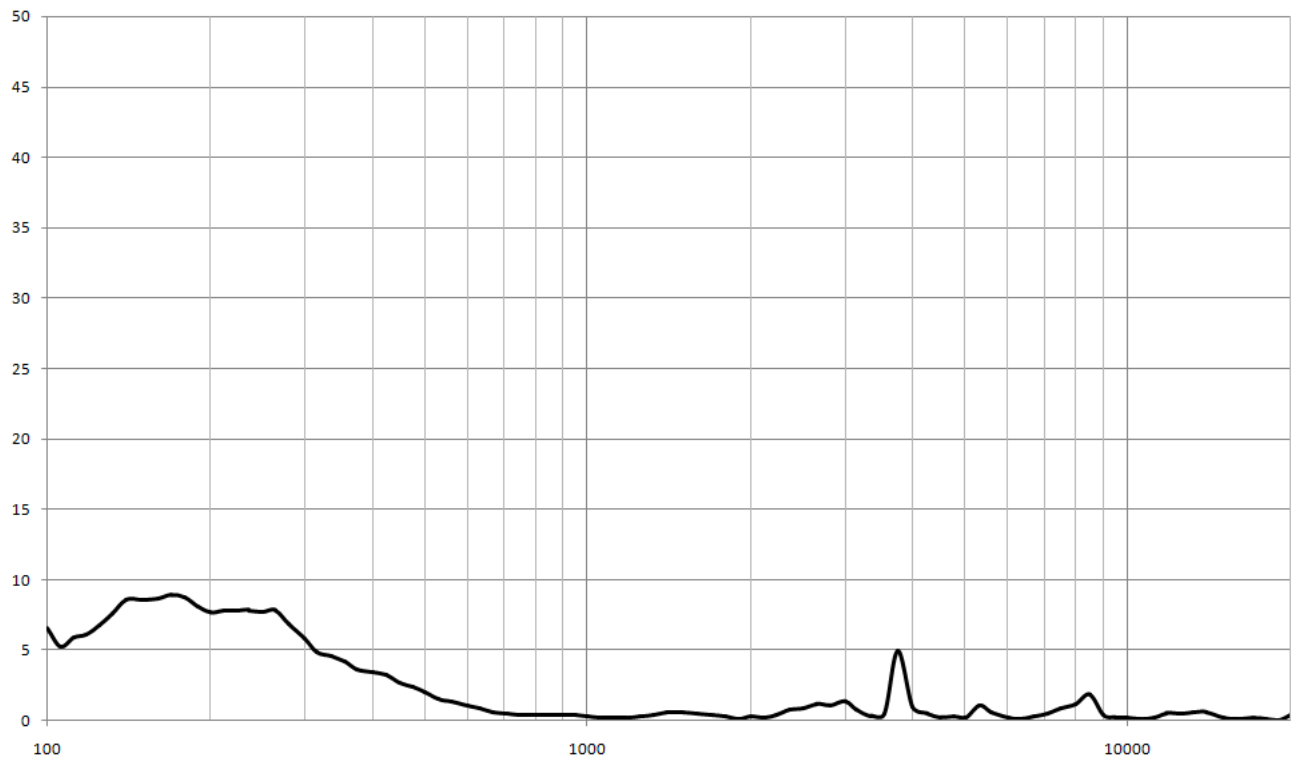

RELIABILITY TEST

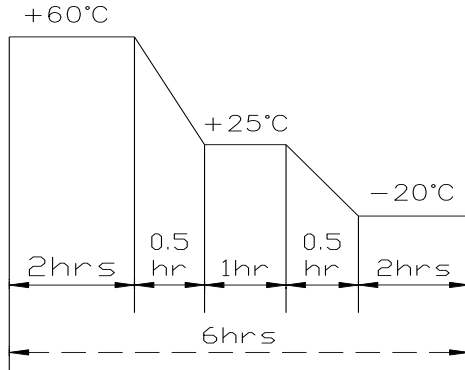1	Reliability Test Performance	After any following test, parts should conform to original performance within ± 3 dB tested with Rated Power, after 6 hours of recovery period.
2	High Temperature Test	96 hours at $+60^{\circ}\text{C} \pm 3^{\circ}\text{C}$
3	Low Temperature Test	96 hours at $-20^{\circ}\text{C} \pm 3^{\circ}\text{C}$
4	Humidity Test	96 hours at $+30^{\circ}\text{C} \pm 3^{\circ}\text{C}$, 92-95% RH
5	Temp./Humidity Cycle	The part shall be subjected 5 cycles. One cycle shall be 6 hours and consist of 
6	Vibration Test	Frequency: 10~55~10Hz Oct/min Amplitude: 1.5mm Duration: 2 hours each of 3 perpendicular directions
7	Drop Test	Drop the speaker contained in normal box onto the surface of 40mm thick board 10 times from the height of 75cm
8	Operation Life Test	Must perform normal with program White-Noise source at Rated Power for 96 Hours
9	Termination Strength	Apply 3.0N(0.306kg) to each terminal in horizontal direction for 30 seconds; Apply 2.0N(0.204kg) to each terminal in vertical direction for 30 seconds;

MEASURING METHOD


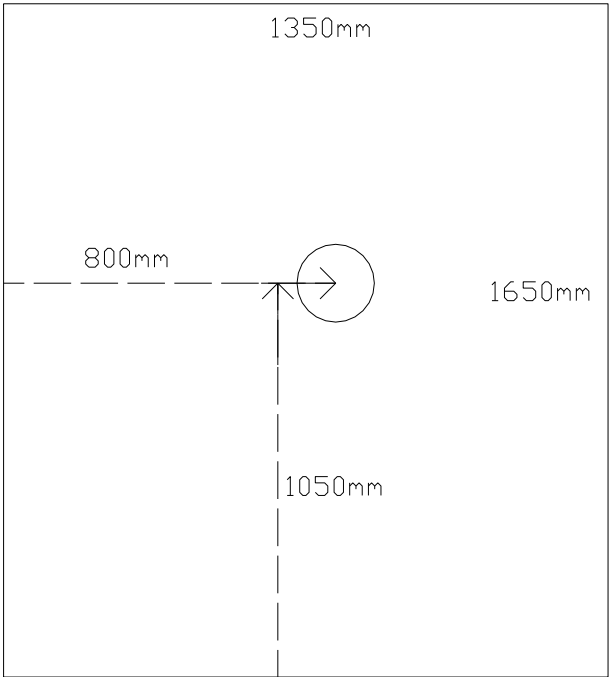


Fig. 1 Block Diagram for Measurement Method

Standard test condition of speaker


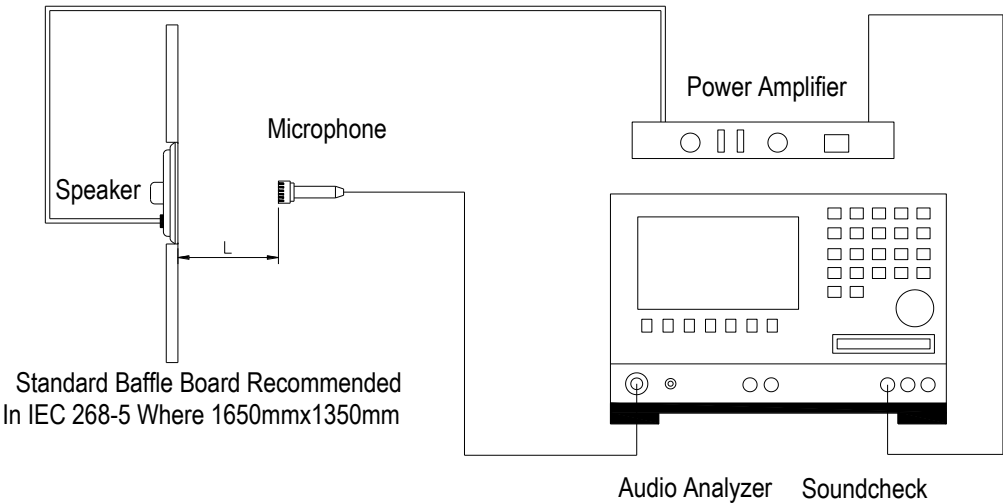


L=10cm

Fig. 2 Speaker Test Condition

PACKAGING

units: cm

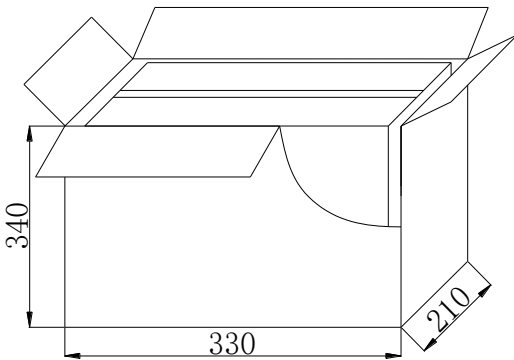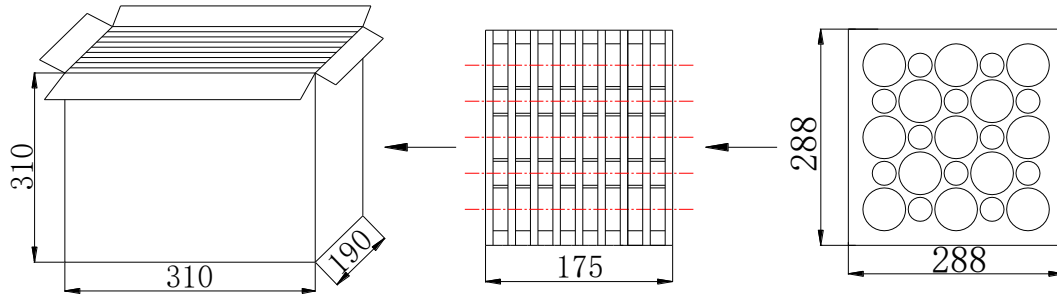

1. Each clap board 25pcs, each carton
8 pcs clap board
200 pcs/carton
2. N.W: 11 KG, G.W:13 KG
3. Corrugated paper: 290*290mm 2 PCS
4. inner carton : 310*190*310mm 1 PCS
5. outer carton : 330*210*340mm 1 PCS