



Loudspeaker

40.0 × 40.0 × 20.0 mm

CR4040L20DN4

Revision

Date	Version	Status	Changes	Approver
2018/12/25	V0.1	Draft	First release	AX


Specifications

Parameter	Conditions/Description	Values	Units
Rated Input Power		4.0	W
Max Input Power		5.0	W
Rated Impedance	at 2.0 kHz	4±15%	Ω
Sound Pressure Level (S.P.L.)	at 0.8K 1.0K 1.2K 1.5KHz in1.0W/0.5M average (0dB SPL=20μPa)	81±3	dB
Resonant Frequency (Fo)	at 1.0 V	230±20%	Hz
Frequency Range	Output S.P.L. -10dB	Fo~20K	Hz
Distortion	at 1K Hz, input 0.1W,	< 5%	-
Magnet	NdFeB	Φ12.5*3	mm
Buzz, Rattle, etc.	must be normal at sine wave between Fo ~ 4K Hz	4.0	V
Polarity	cone will move forward with positive dc current to“+” terminal		
Weight		16	g
Operating Temperature		-20~+60	°C
Storage Temperature		-30~+70	°C

Notes: All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.

MECHANICAL DRAWING

Units: mm

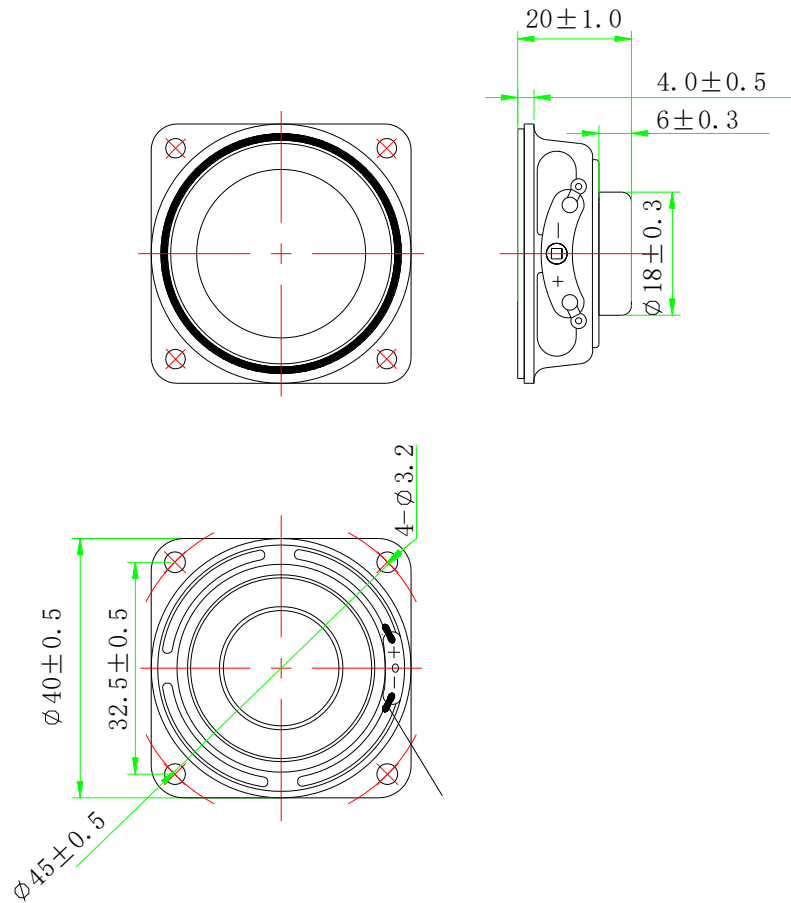Tolerance: $\pm 0.5\text{mm}$ 

CONSTRUCTION DETAIL


PART NO.	PART NAME	Q'TY	MATERIAL	REMARK
1	Gasket	1	Paper	
2	Diaphragm	1	PU+Paper	
3	VOICE COIL	1	Paper +Cu	
4	Plate	1	SPCC	
5	Magnet	1	NdFeB	
6	PCB Terminal	1	Paper+steel	
7	Frame	1	SPCC	

RESPONSE CURVES

Frequency Response Curve

Test condition: 1.0W/0.5M,


XY Graph 12

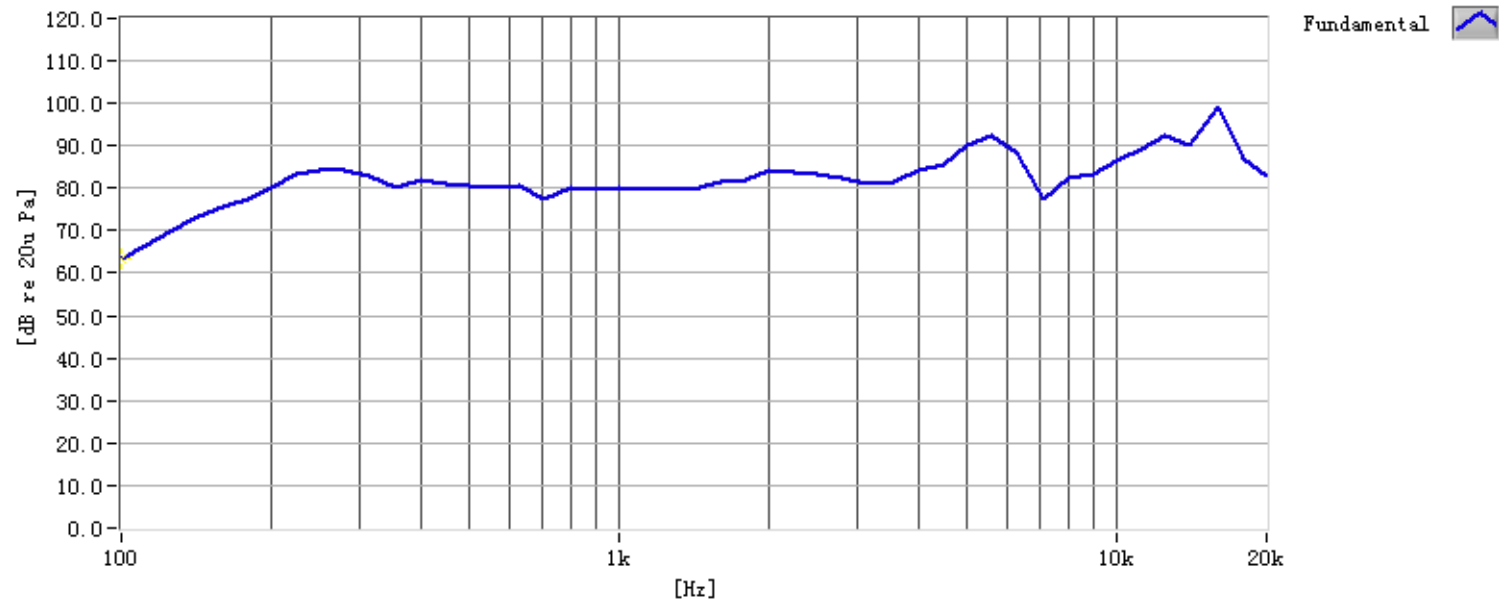

Total Harmonic Distortion Curve

Test condition: 0.1W/0.5M,

XY Graph 13

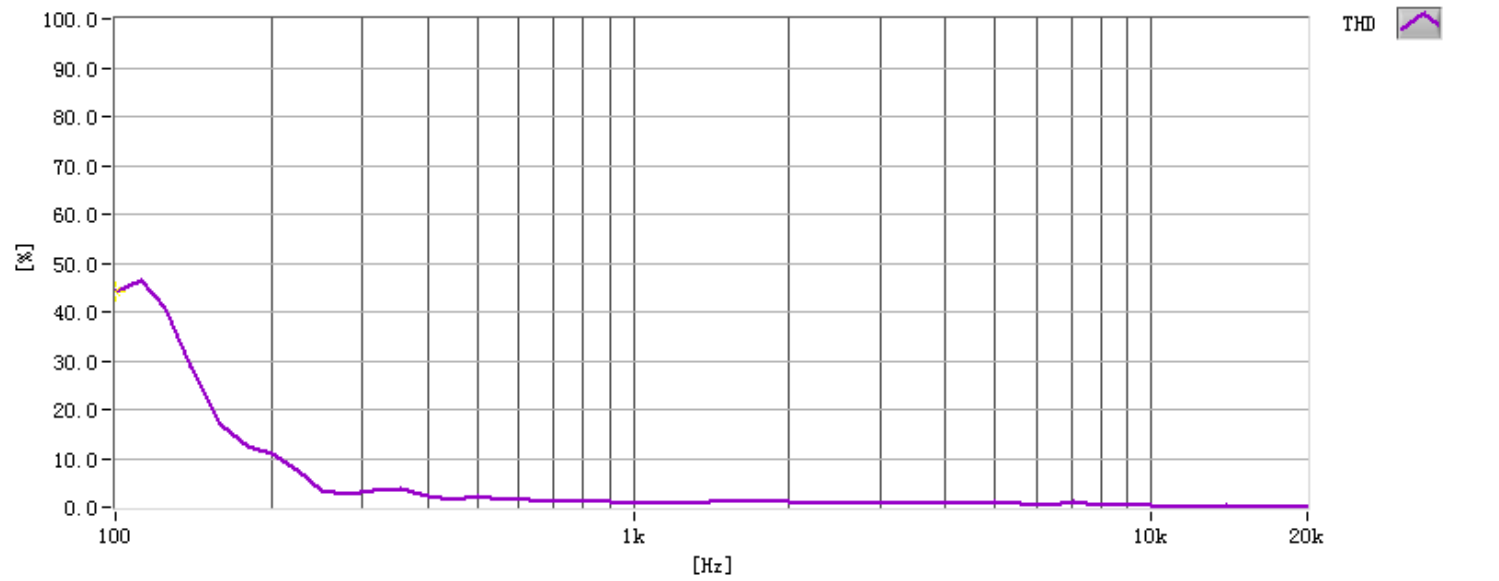

RELIABILITY TEST

1	Reliability Test Performance	After any following test, parts should conform to original performance within ± 3 dB tested with Rated Power, after 6 hours of recovery period.
2	High Temperature Test	96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$
3	Low Temperature Test	96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$
4	Humidity Test	96 hours at $+30^{\circ}\text{C} \pm 3^{\circ}\text{C}$, 92-95% RH
5	Temp./Humidity Cycle	The part shall be subjected 5 cycles. One cycle shall be 6 hours and consist of 90 ~ 95 % RH 65°C 25°C 0.5hr 6hrs 0.5hr 5hrs
6	Vibration Test	Frequency: 10~55~10Hz Oct/min Amplitude: 1.5mm Duration: 2 hours each of 3 perpendicular directions
7	Drop Test	Drop the speaker contained in normal box onto the surface of 40mm thick board 10 times from the height of 75cm
8	Operation Life Test	Must perform normal with program White-Noise source at Rated Power for 96 Hours
9	Termination Strength	Apply 3.0N(0.306kg) to each terminal in horizontal direction for 30 seconds; Apply 2.0N(0.204kg) to each terminal in vertical direction for 30 seconds;

MEASURING METHOD


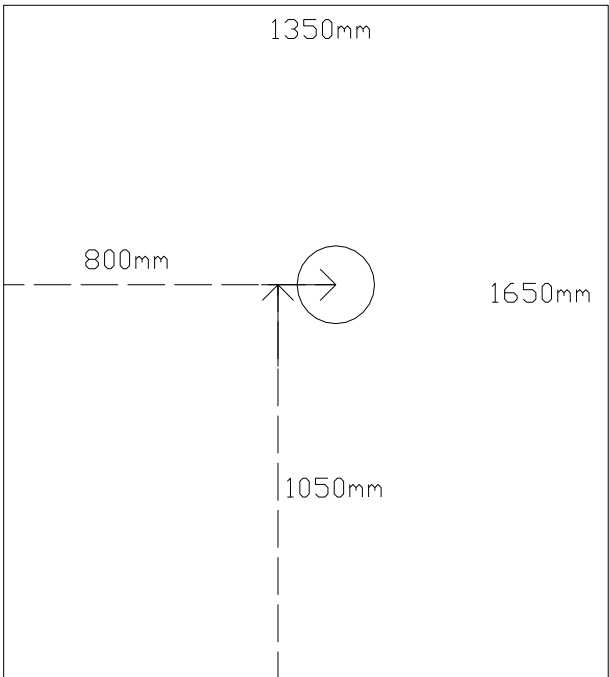


Fig. 1 Block Diagram for Measurement Method

Standard test condition of speaker

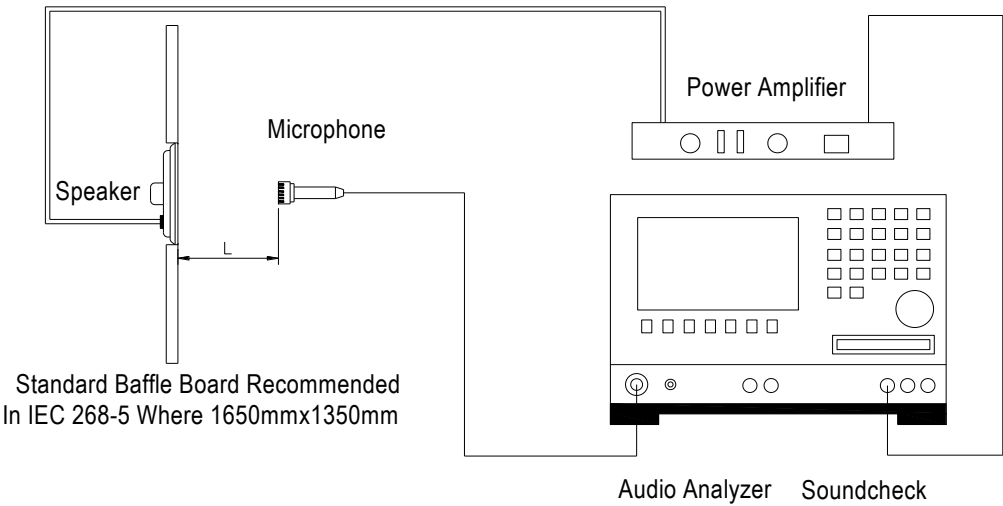


L=50cm

Fig. 2 Speaker Test Condition

PACKAGING

units: mm

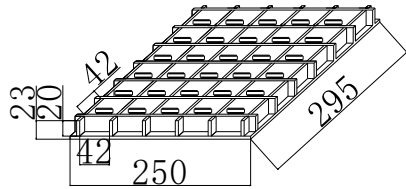

1. Each clapboard 30 pcs,
Each carton 20 clapboards,
600 pcs/carton
N.W: 11.6 KG, G.W:13.6 KG
2. Corrugated paper: 295*250mm 2 pcs
3. Carton size: 520*310*260mm 1 pcs

