



Dynamic Loudspeaker

53×53×31 mm

With IPX5

CS53H310BN4WPG

Revision


Date	Version	Status	Changes	Approver
2021/07/05	V0.1	Draft	First release	AX

Parameter	Conditions/Description	Values	Units
Rated Input Power		10	W
Max Input Power		12	W
Rated Impedance	at 2.0 kHz	4±15%	Ω
Sound Pressure Level (S.P.L.)	at 0.6K 0.8K 1.0K 1.2K Hz in 0.1W/0.1M average (0dB SPL=20μPa)	88±3	dB
Resonant Frequency (Fo)	at 1.0 V	150±20%	Hz
Frequency Range	Output S.P.L. -10dB	Fo~10K	Hz
Distortion	at 1K Hz, input 1W,	< 5%	-
Magnet	NdFeB	Φ18.5*5	mm
Buzz, Rattle, etc.	must be normal at sine wave between Fo ~ 4K Hz	8.9	V
Polarity	cone will move forward with positive dc current to "+" terminal		
Weight		68±8%	g
Operating Temperature		-30~+70	°C
Storage Temperature		-40~+80	°C
Waterproof Rating		IPX5	

Notes: All specifications measured at 5~35°C, humidity at 45~85%, under 86~106 kPa pressure, unless otherwise noted.

MECHANICAL DRAWING

Units: mm
Tolerance: $\pm 0.5\text{mm}$

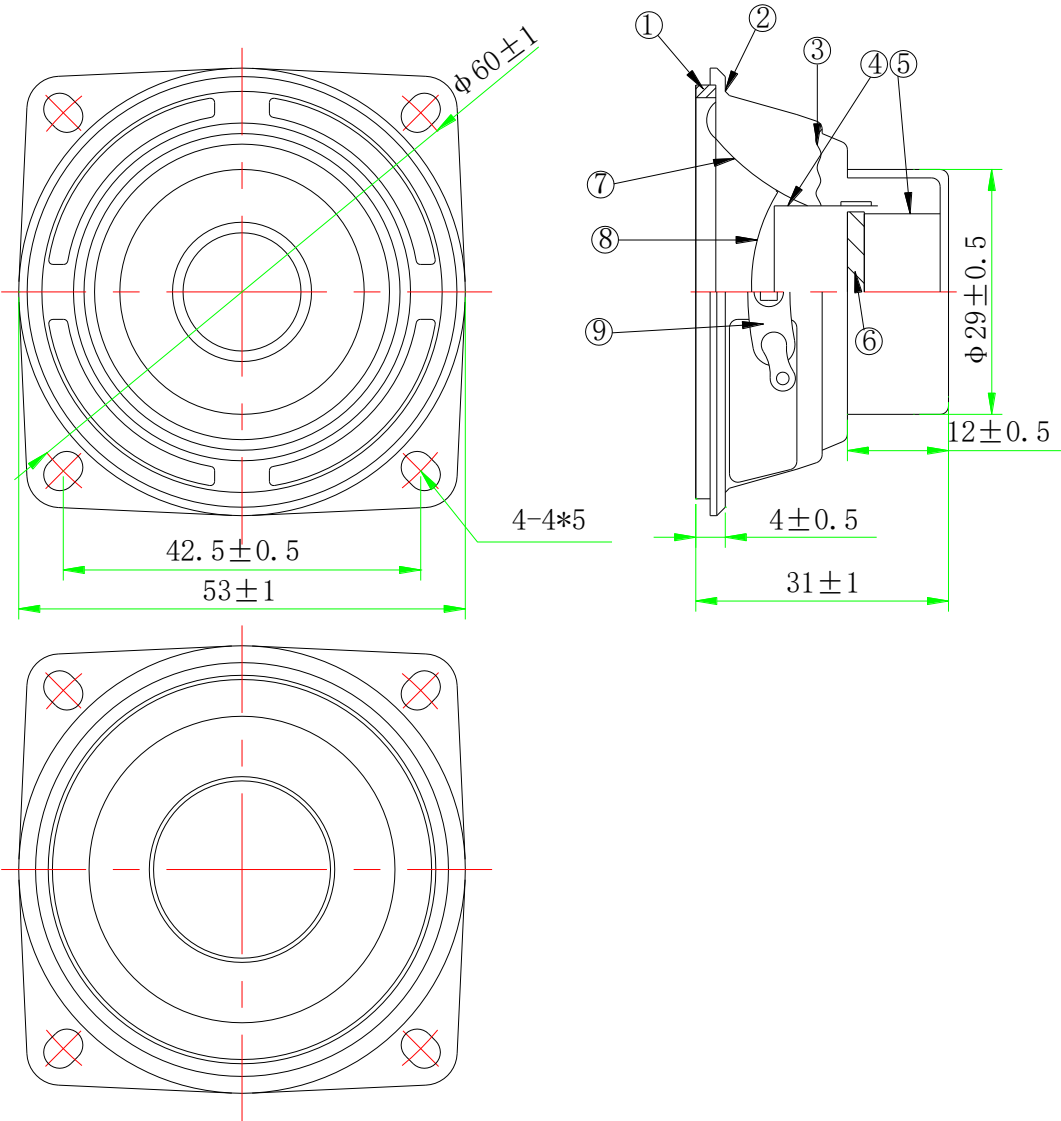


CONSTRUCTION DETAIL

NO	零件 Component	材质 Material
1	压边 Gasket	橡胶压边 Rubber
2	盆架 Frame	冷轧钢板 SPCC
3	弹波 Damper	布 Cloth
4	音圈 Voice coil	胶管+铜 KSV+Cu
5	磁铁 Magnet	汝铁硼 NdFeB
6	极片 Plate	冷轧钢板 SPCC
7	鼓纸 Cone	PU 边 PP 盆 PU+PP
8	帽子 Dust cap	雅黑 PET
9	接线板 Terminals	纸板+铁 Paper+steel


RESPONSE CURVES

Frequency Response Curve

Test condition: 0.1W/0.1M,

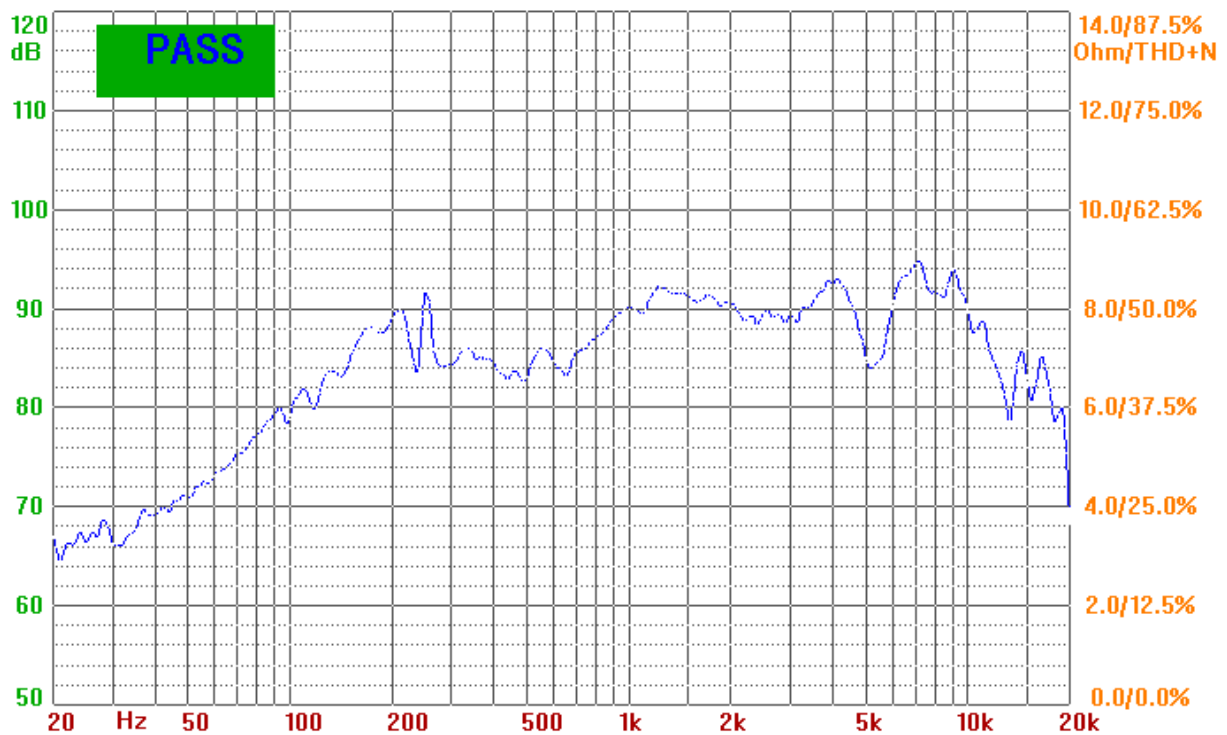

RELIABILITY TEST

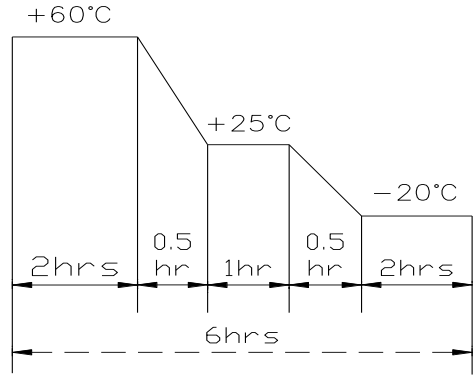1	Reliability Test Performance	After any following test, parts should conform to original performance within ± 3 dB tested with Rated Power, after 6 hours of recovery period.
2	High Temperature Test	96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$
3	Low Temperature Test	96 hours at $-30^{\circ}\text{C} \pm 3^{\circ}\text{C}$
4	Humidity Test	96 hours at $+30^{\circ}\text{C} \pm 3^{\circ}\text{C}$, 92-95% RH
5	Temp./Humidity Cycle	The part shall be subjected 5 cycles. One cycle shall be 6 hours and consist of 
6	Vibration Test	Frequency: 10~55~10Hz Oct/min Amplitude: 1.5mm Duration: 2 hours each of 3 perpendicular directions
7	Drop Test	Drop the speaker contained in normal box onto the surface of 40mm thick board 10 times from the height of 75cm
8	Operation Life Test	Must perform normal with program White-Noise source at Rated Power for 96 Hours
9	Termination Strength	Apply 3.0N(0.306kg) to each terminal in horizontal direction for 30 seconds; Apply 2.0N(0.204kg) to each terminal in vertical direction for 30 seconds;

MEASURING METHOD

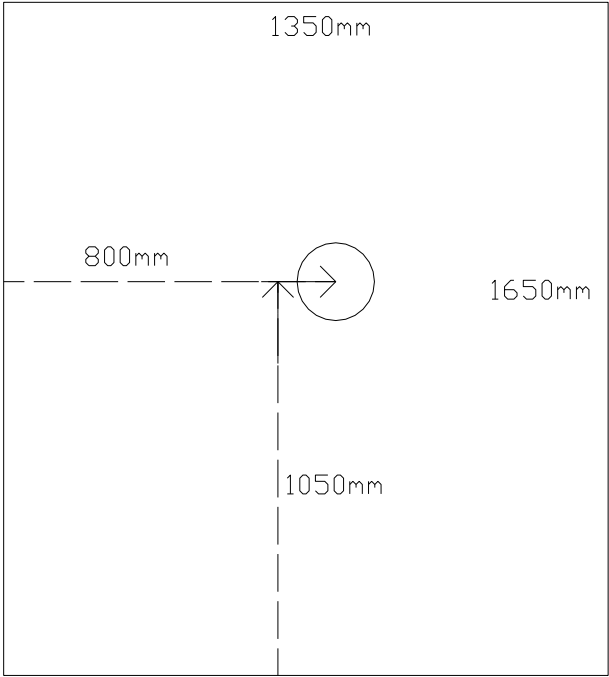


Fig. 1 Block Diagram for Measurement Method


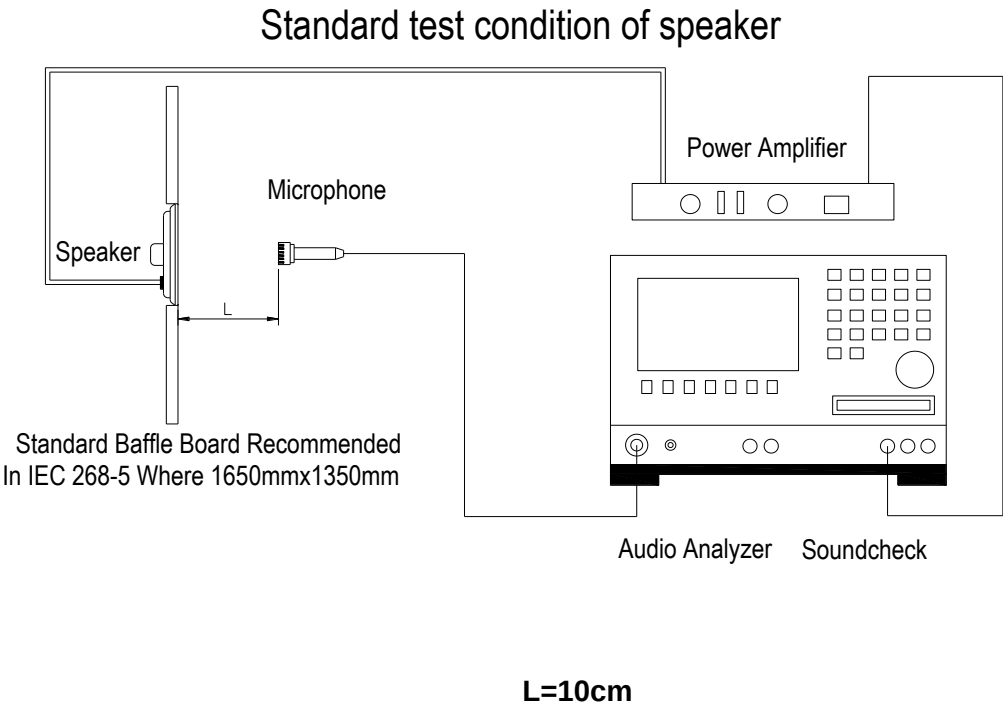


Fig. 2 Speaker Test Condition

PACKAGING

units: mm

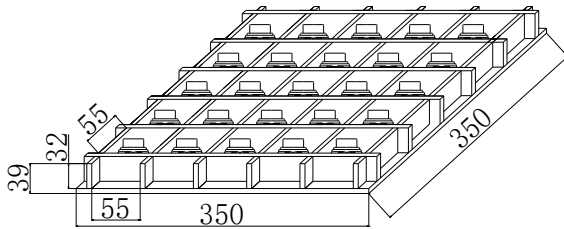

1. Each clapboard 25pcs,
each carton 5 clapboards,
125 pcs/carton
N.W: 8.5KG, G.W: 10.5 KG
2. Corrugated paper: 350*350 mm 1 pcs
3. Carton size: 370*370*220 mm 1 pcs

