


MAIN APPLICATION	TYPE	MAGNET	
Telecom	50mm	Material	Magnet Size (Square)
		Ferrite	□28.5x□12.5x5mm


ITEM	SPECIFICATIONS	VALUES	TEST CONDITIONS
1	Dimensions	Ø50mm	per mechanical Drawings
2	Impedance	25Ω ±15%	1kHz / 1.0V
3	Nominal Power	0.3 Watts	
4	Max Power	0.8 Watts	
5	Resonant Frequency	390Hz ±15%	1.0V
6	Sensitivity (S.P.L.)	77dB ±2dB	0.1W/1m, Average 0.6/1.0/2.0/3kHz
7	Frequency Response	390Hz to 4KHz	0.1W/1m; Tolerance Max 15dB
8	THD	2% max	1kHz 0.1W/1m
9	Storage Temperature	-25°C to +80°C guaranteed range for transportation & storage	
10	Polarity	Membrane move forward when positive DC is applied to the '+' terminal	

ITEM	TEST	TEST CONDITIONS	RESULT
11	Rub & Buzz	Rated Power Sin wave (speaker frequency range)	No Buzzes or Rattles.
12	High Voltage Resistance	100VAC / 1mn between terminals and frame.	Must be normal
13	Insulation Resistance	100VDC between terminals and frame.	≥ 1MΩ
14	Load	White Noise at Rated Power for 96h	After 1 hour of rest at room ambient conditions, speakers must meet specs items 2 through 6.
15	High Temp.	+60±3°C for 96h (random 20%-50%RH)	
16	Low Temp.	-25±3°C for 96h (random 20%-50%RH)	
17	Humidity	+40±3°C ambient and 90%RH for 96h	



Typical Frequency Response

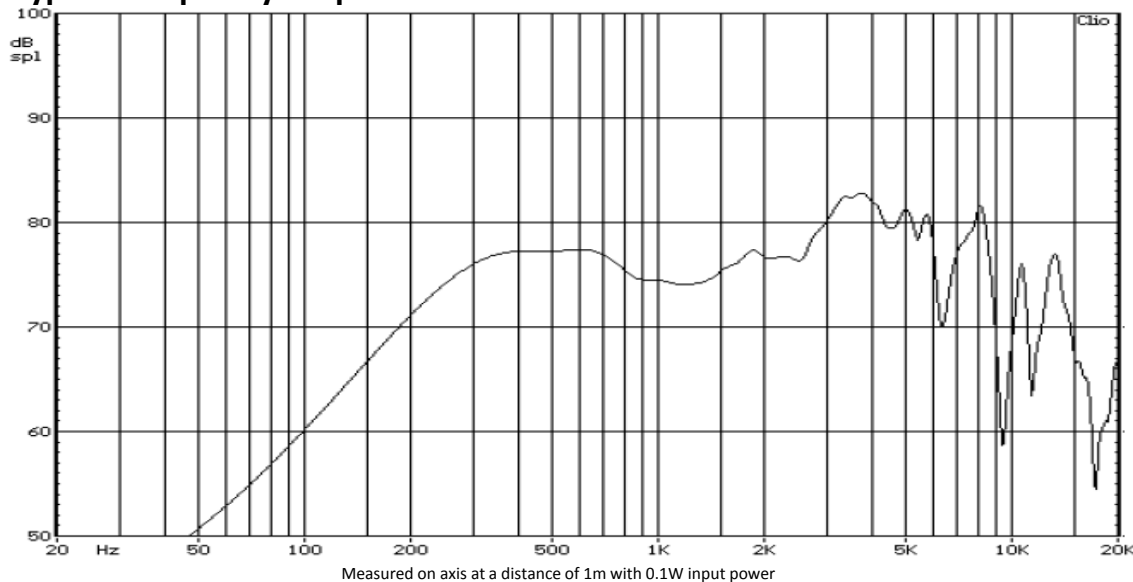

GASKET	MEMBRANE	BASKET	WEIGHT	REMARKS
-	Plastic	PP + GF	47 ±5g	With cable 85mm

PACKAGING	SPECIFICATIONS	
Carton size:	365x365x185mm	
Qty/Carton:	216 (3 layers of 72pcs)	
Gross Weight:	12.5Kg	

Mechanical Drawings (in mm)

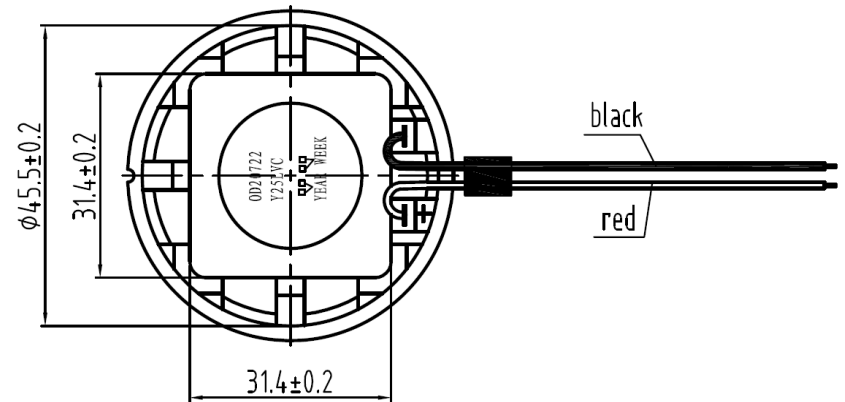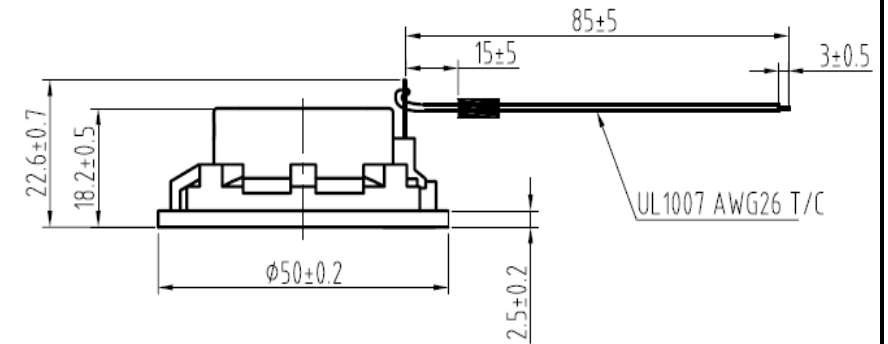

Part n°

SOD20722Y25LVC

REV	DATE	SHEET	
0.2	01/08/2017	1 of 1	RoHS Compliant