


HODTEC-31268-000
SHT 1.1




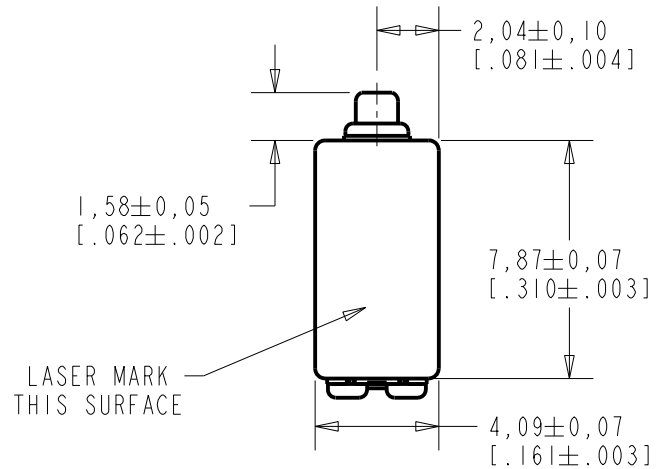


NOTES:

1. A POSITIVE GOING VOLTAGE AT TERMINAL 2, RELATIVE TO TERMINAL 1, CAUSES A DECREASE IN PRESSURE AT THE SOUND OUTLET.

2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO ±0,17 [.007].

3 RECEIVERS WIRED IN ELECTRICAL SERIES WHEN CONNECTED TO TERMINAL 1 AND TERMINAL 2.

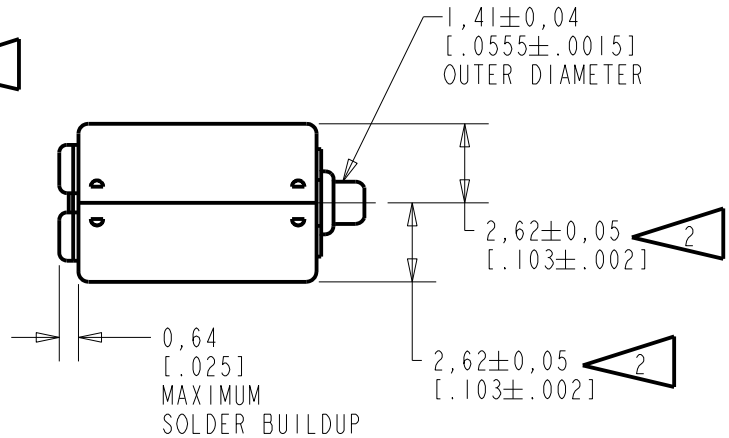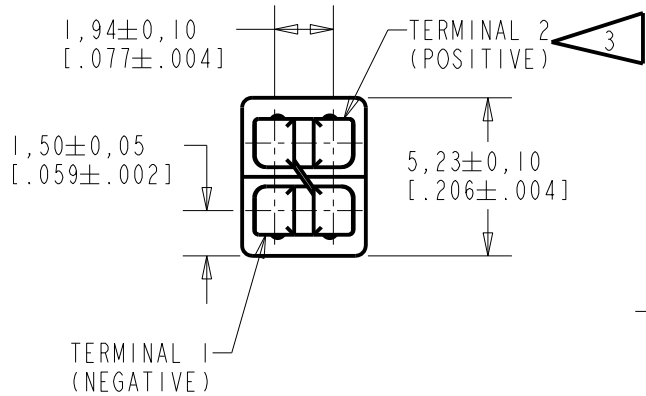

NOMINAL WEIGHT
.71 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
A	C10111865	12-14-10	Active	A

SCALE:	4:1	DR. BY	DATE
DO NOT SCALE DRAWING		KL	12-14-10
TITLE:	RECEIVER	GJP	12-15-10
	HODTEC-31268-000	APP. BY	DATE
	OUTLINE DRAWING	GJP	12-21-10
			SHT 1.1


KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

THE HODTEC-31268-000 IS A PAIR OF BALANCED ARMATURE RECEIVERS INTENDED FOR USE IN HIGH POWER HEARING AIDS. IT HAS A MEDIUM DCR TO IMPEDANCE RATIO AND IS A SIMILAR SIZE TO AN EF RECEIVER.

NO DAMPING

HODTEC-31268-000
SHEET 2.1

CONSTANT VOLTAGE DRIVE CONDITIONS

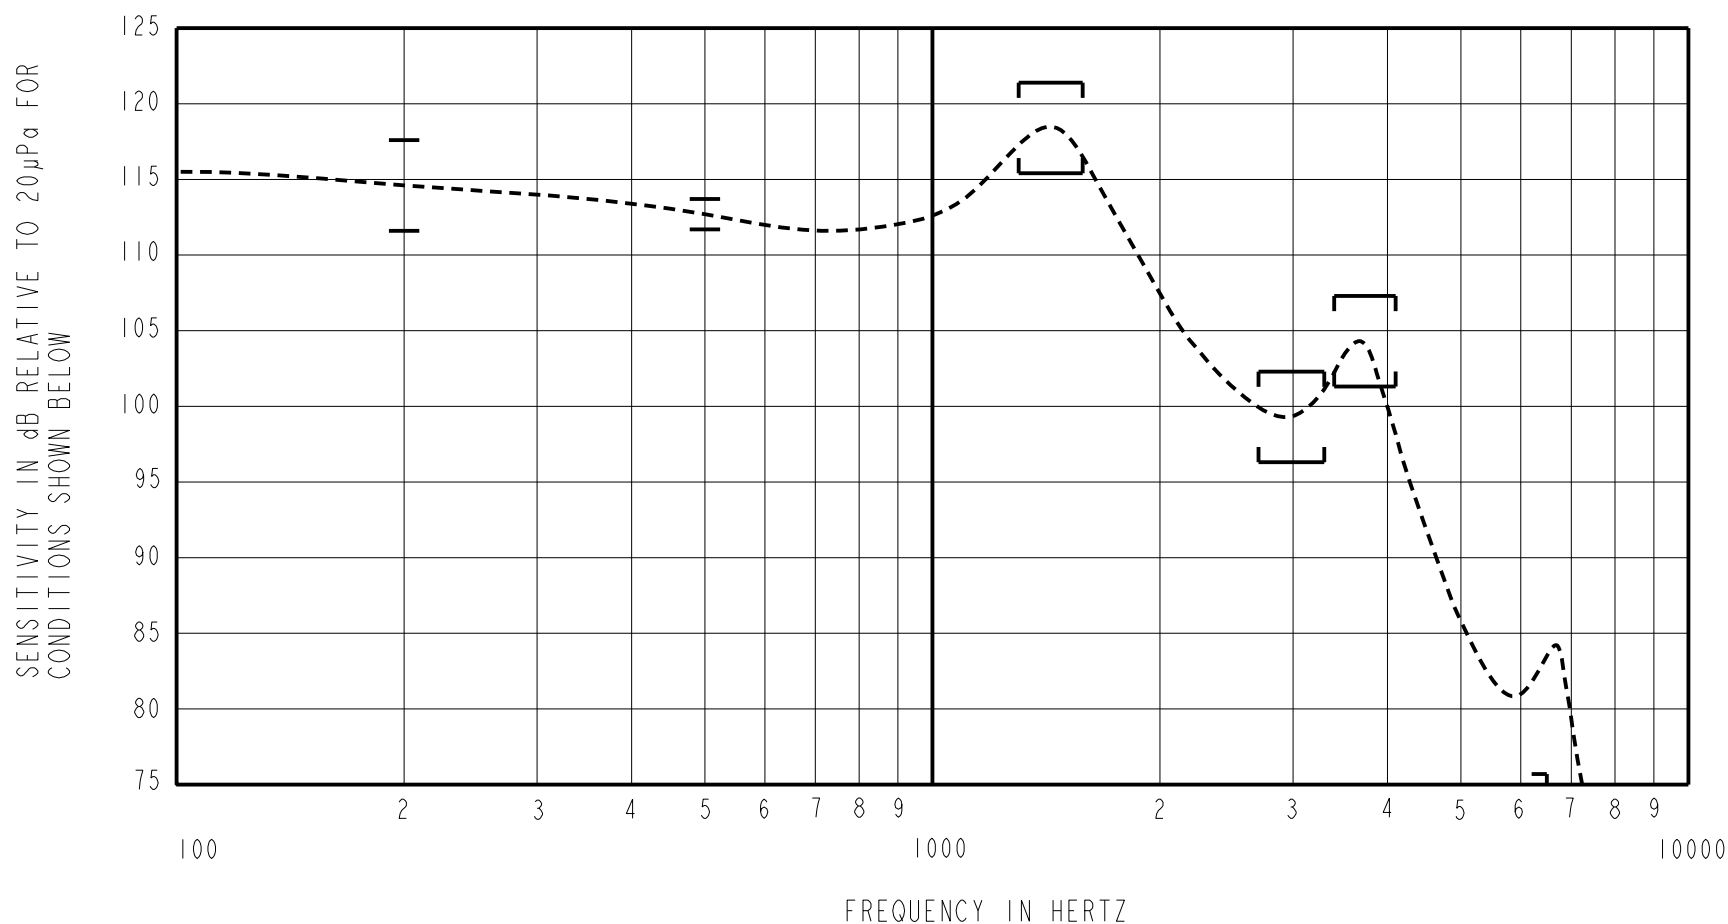

ACOUSTICAL

SENSITIVITY
DEVICE WILL PRODUCE THE SPL LISTED BELOW UNDER TEST CONDITIONS DESCRIBED IN TABLE 3. NOMINAL SENSITIVITY AT 500 Hz IS dB RELATIVE TO 20µPa. ALL OTHER VALUES IN dB RELATIVE TO THE SENSITIVITY AT 500 Hz.

FREQUENCY (Hz)	MINIMUM	NOMINAL	MAXIMUM
200	-1.1	+1.9	+4.9
500	-1.0	112.7	+1.0
1300-1580	+2.7	+5.7	+8.7
2700-3300	-16.4	-13.4	-10.4
3400-4100	-11.4	-8.4	-5.4
6500	-37.0	---	---

TABLE 1

TOTAL HARMONIC DISTORTION
DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS LISTED BELOW.

FREQUENCY (Hz)	AC DRIVE (V rms)	DC BIAS (mA)	LIMIT (%)
1/3 PEAK	0.248	0	3
1/2 PEAK	0.248	0	3
1/3 PEAK	0.699	0	8
1/2 PEAK	0.699	0	8

TABLE 2

TEST CONDITIONS

NOMINAL SOURCE VOLTAGE	0.248 V rms, 0 mA DC BIAS
SOURCE IMPEDANCE	<1 Ohm
TUBING	10mm [.394"] LONG X 1mm [.039"] ID ("ITE")
COUPLER CAVITY	2 cm ³ , SIMULATED ANSI S3.7 TYPE HA-3 (IEC 60318-5)

TABLE 3

ELECTRICAL

DC RESISTANCE	71.0 OHMS ± 10%
IMPEDANCE @ 500 Hz	112 OHMS ± 15%
IMPEDANCE @ 1kHz	224 OHMS ± 15%
INDUCTANCE @ 500 Hz	28 mH TYP
CAPACITANCE @ 10 MHz	5.2 pF TYP

TABLE 4

ISOLATION: CASE WILL BE ELECTRICALLY ISOLATED FROM THE COIL CIRCUIT.

MECHANICAL

PORT LOCATION: 12S

SOLDER TYPE: SAC305

TEMPERATURE

OPERATING: SENSITIVITY WILL NOT VARY MORE THAN +1/-3 dB FROM -17°C TO 63°C
STORAGE: -40°C TO 63°C

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
A	C10111865	12-14-10	Active	A

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

DR. BY	DATE
KL	12-14-10
CK. BY	DATE
GJP	12-15-10
APP. BY	DATE
GJP	12-21-10

TITLE: **RECEIVER** HODTEC-31268-000
PERFORMANCE SPECIFICATION SHT 2.1