

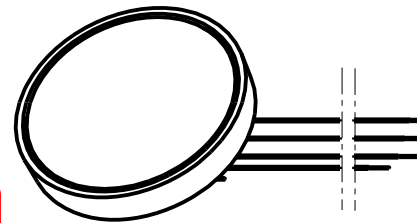
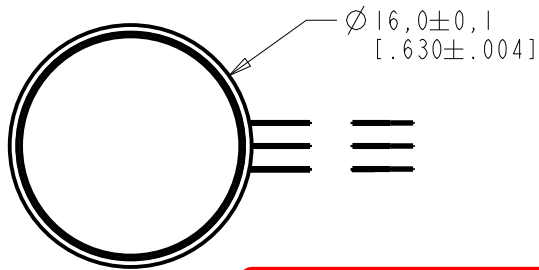
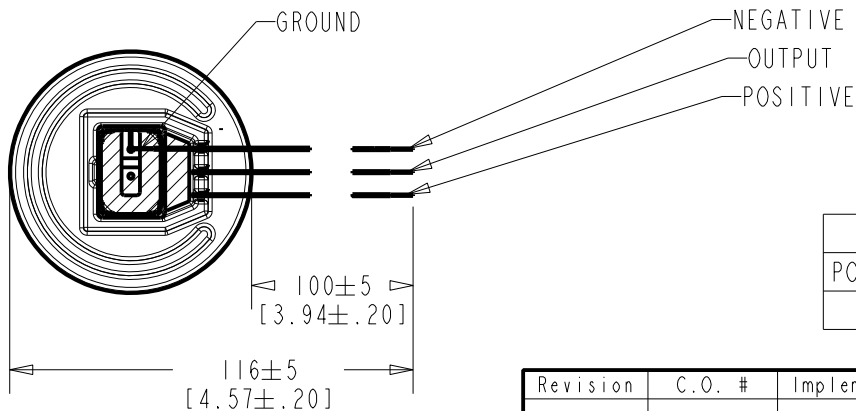


VEK-F-30431-000
SHT 1.1



RED CONTROLLED

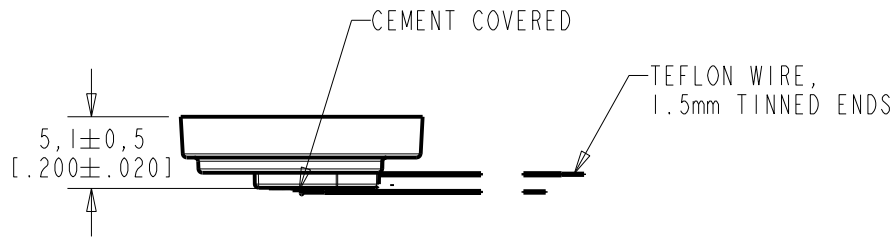

WIRE COLOUR				WEIGHT GRAMS
POSITIVE	OUTPUT	NEGATIVE	GROUND	---
RED	WHITE	BLACK	GREEN	

DIMENSIONS IN MILLIMETERS [INCHES]


Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Active	D
D	C40101206	3-7-13		

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

SCALE: 2:1	DR. BY TT	DATE 8-26-08
DO NOT SCALE DRAWING	CK. BY GJP	DATE 9-11-08
TITLE: WATERPROOF MICROPHONE&CABLE	APP. BY GJP	DATE 9-11-08
OUTLINE DRAWING		

VEK-F-30431-000

SHT 1.1

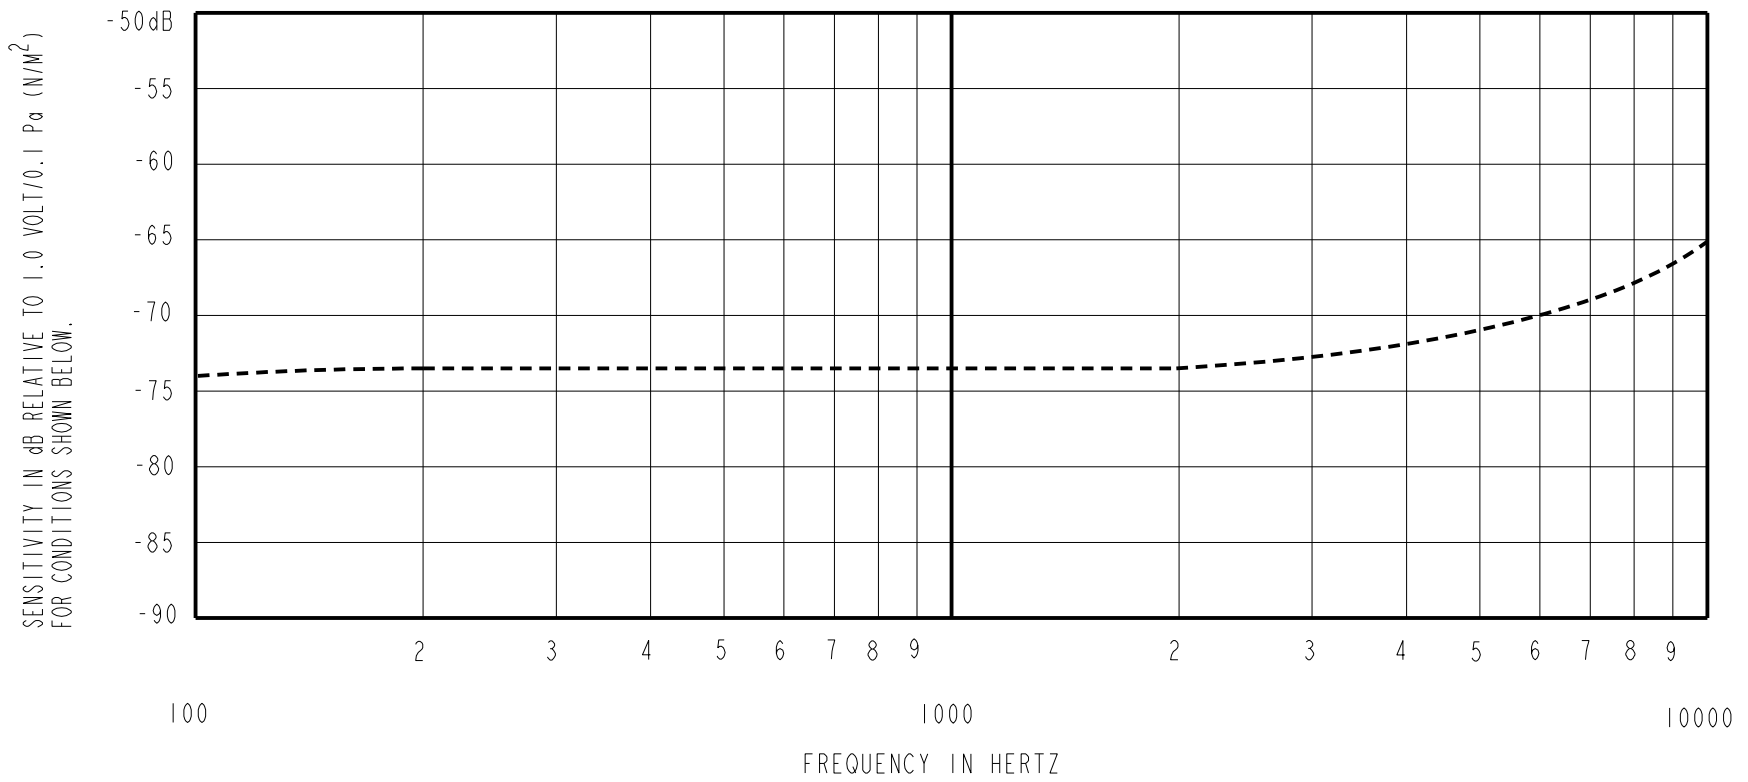


RED CONTROLLED

FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
100	---	-74.0	---	-4.0	+2.0
1000	-76.0	-73.0	-70.0	0.0	0.0
10000	---	-65.0	---	+3.0	+13.0

NOTES:

- MICROPHONE TO BE FUNCTION WITH 10 VDC SUPPLY.
- SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- TEST CONDITIONS:
SEAL PRODUCT TO 74 dB SPL SWEPT
SOUND FIELD CREATED BY VOICE APERTURE.
ARTIFICIAL VOICE:
B & k 4227 MOUTH SIMULATOR.
- FOR MICROPHONE CAPSULE SPEC. SEE DRAWING EK-26899-P58 SHEET 2.1.
- SURVIVES SUBMERSION IN 1m OF WATER FOR 30 MINUTES;
SENSITIVITY WITHIN 3dB OF INITIAL SENSITIVITY AFTER DRIED
FOR 30 MINUTES AT ROOM TEMPERATURE.
- CONNECT SHIELD WIRE TO NEGATIVE WIRE FOR TEST.

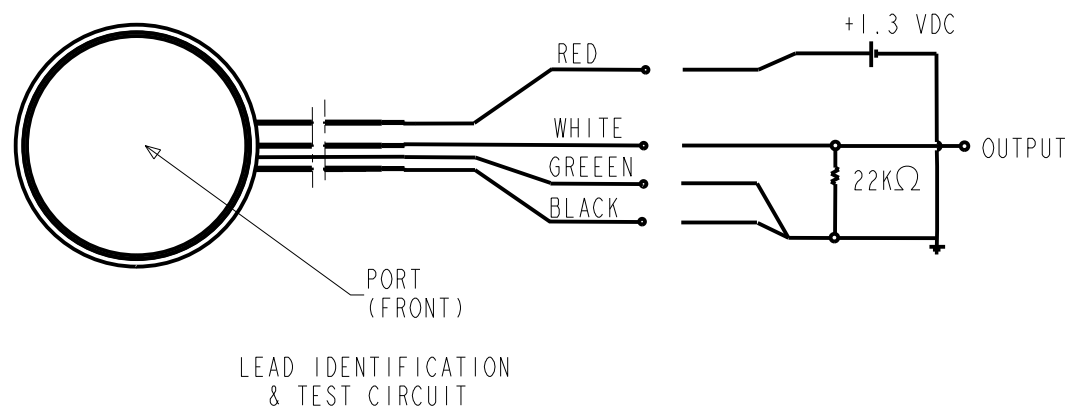

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION		
			Active	D		
D	C40101206	3-7-13				
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE		
TITLE WATERPROOF MICROPHONE & CABLE PERFORMANCE SPECIFICATION			TT	8-26-08		
			VEK-F-30431-000		CK. BY	DATE
			SHT 2.1		GJP	9-11-08
					APP. BY	DATE
		GJP	9-11-08			

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.